

## BVS 15-68 CATV amplifier 38 dB | 100 dBμV CSO/CTB



- ✓ KDG 1 TS 140: C(4.2)
- ✓ Downstream 85...1006 MHz
- ✓ Attenuation and equalization adjustable
- ✓ Interstage attenuation/equalization pluggable with jumpers
- ✓ Upstream 5...65 MHz
- ✓ Return path attenuation adjustable
- ✓ Interstage attenuation/equalization pluggable with jumpers
- ✓ Al-die-cast/plastic housing
- ✓ Test ports at in- and output
- ✓ Vodafone listed

## Order information

Type	BVS 15-68
Order no.	BVS01568
GTIN	7611682003710
PE	1
VE	1
EU customs tariff number	85437030



## Technical data

EMC	according to EN 50083-2, class A
Classification according to KDG 1 TS 140	C(4.2)
Downstream	
Frequency range	85...1006 MHz
Gain	38 dB
Max. output level CSO/CTB (CENELEC raster, 41 channels, 60 dB IMA)	100 dBμV
Attenuation: continuously adjustable	0...20 dB
Equalization: continuously adjustable	0...18 dB
Attenuation interstage: pluggable with jumpers	0/6 dB
Equalization interstage: pluggable with jumpers	0/2/4/6 dB
Return loss	≥ 18 dB (-1.5 dB/Octave)
Noise figure typ.	≤ 7 dB
Upstream	
Frequency range	5...65 MHz
Gain	30 dB
Noise figure	≤ 7 dB
Attenuation: continuously adjustable	0...20 dB
Equalization interstage: pluggable with jumpers	0/3/6/9 dB
Attenuation interstage: pluggable with jumpers	0/6 dB
RF connectors	
Type	F-female
Test port at in-/output	-20 ±2.5 dB/-20 ±1.0 dB
General	
Operating temperature range (acc. to EN 60065)	-20...+50°C
Switching power supply	100...240 VAC / 50...60 Hz
Power indicator	LED
Power consumption	5.5 W
Equipotential bonding connection	4 mm²
Dimensions (W × H × D) appr.	200 × 90 × 50 mm
Weight	0.474 kg
IP code	IP20

## Example of use

Up- und Downstream (Koax)

Up- and Downstream (Coax)

Potentialausgleich

Equipotential bonding

Antennensteckdosen = BSD 963-11N

Erdungswinkel = QEW 5-50

Verteiler = BVE 4-01P


Koaxialkabel = SKB 94-0x

Antenna wall outlets = BSD 963-11N

Earthing angles = QEW 5-50

Splitters = BVE 4-01P

Coaxial cable = SKB 94-0x

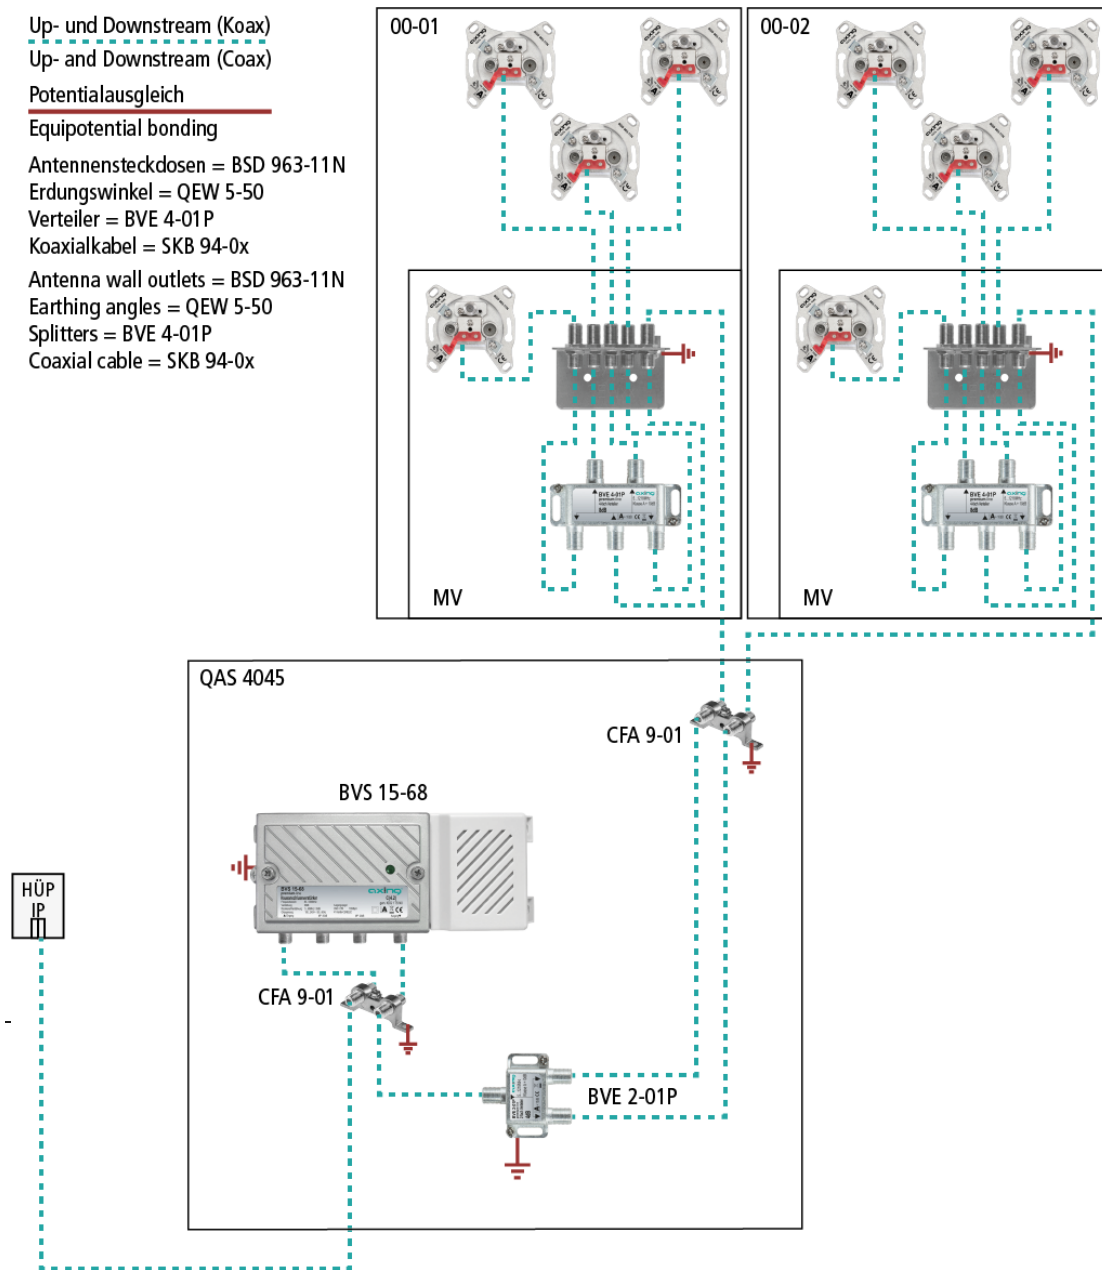

## Suitable products

[QEW 5-50 Earthing angle | 5-way, two-rowed](#)

[QEW 6-50 Earthing angle | 6-way, two-rowed](#)

[QEW 7-50 Earthing angle | 7-way, two-rowed](#)

[QEW 8-50 Earthing angle | 8-way, two-rowed](#)

[QEW 9-50 Earthing angle | 9-way, two-rowed](#)

[QEW 11-50 Earthing angle | 11-way, two-rowed](#)

[QEW 13-50 Earthing angle | 13-way, two-rowed](#)

[QEW 17-50 Earthing angle | 17-way, two-rowed](#)

[QEW 25-50 Earthing angle | 25-way, three-rowed](#)