

EOC 1-11 Ethernet over Coax | Peer-to-Peer



- ✓ Feeding IP signals into SAT, CATV or DVB-T systems or headends
- ✓ Transmission range 5...65 MHz
- ✓ High EoC data rate 720 Mbps (gross)
- ✓ 2 x RJ 45 Connectors
- ✓ Incl. external switching power supply

Order information


Type	EOC 1-11
Order no.	EOC00111
GTIN	7611682007107
PE	1
VE	1
EU customs tariff number	85176200

Technical data

Frequency range	5...1218 MHz
Frequency range transmission	5...65 MHz
Frequency range TV bypass	85...1218 MHz
Maximum allowed attenuation in coaxial network	80 dB
EoC	
Standard	ITU-T G.9960/G.9961 G.hn over Coax
Max. number of devices in EoC network	16
Interfaces	
Ethernet connectors (LAN)	2 x RJ 45
Ethernet standards	IEEE 802.3u 100BaseT Fast Ethernet IEEE 802.3ab 1000BaseT Gigabit Ethernet
General	
Operating voltage	12 VDC
Power consumption	4 W
Operating temperature range (acc. to EN 60065)	0°C...40°C
Dimensions (W x H x D) appr.	130 x 95 x 32 mm
Weight	0,152 kg
External accessories	
Switching power supply	100...240 V~/50/60Hz 12 V= /0,5 A

Example of use

Internet vom Telefonanbieter | Internet from telephone operator

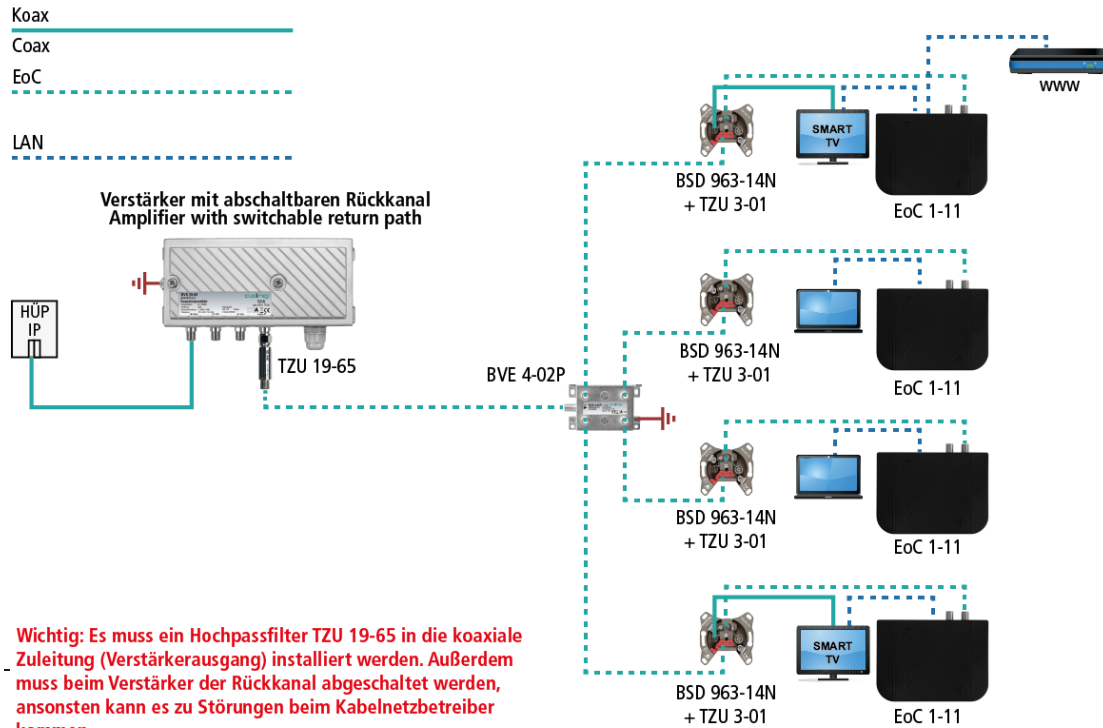

Wichtig: Es muss ein Hochpassfilter TZU 19-65 in die koaxiale Zuleitung (Verstärkerausgang) installiert werden. Außerdem muss beim Verstärker der Rückkanal abgeschaltet werden, ansonsten kann es zu Störungen beim Kabelnetzbetreiber kommen.

Important: A high-pass filter TZU 19-65 must be installed in the coaxial feed line (at amplifier output). In addition, the return path of the amplifier must be switched off. Otherwise it may cause interferences in the cable network.

Suitable products

[EOC 2-11 Ethernet over Coax | Peer-to-Peer | WiFi](#)

[BZU 30-65 Passive return channel bypass](#)

[TZU 40-03 EoC inserter | 4 dB](#)

[TZU 40-04 EoC inserter | 15 dB](#)