SPU 58-06 Multiswitch stand-alone/cascade unit | 5 in 8 | basic-line



- ✔ For up to 8 subscribers
- ✔ Subscriber ports SAT active, terrestrial passive
- ✔ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✔ Receiver-fed multiswitch – no power supply necessary
- ✔ Cascadable - Cascade outputs must be terminated with DC-isolated 75 Ohm terminating resistors (e.g. CFA 11-00, not included in the scope of delivery)


Order information

Type	SPU 58-06
Order no.	SPU05806
GTIN	7611682005332
PE	1
VE	1
EU customs tariff number	85291095

Technical data

Inputs	
Number	5
Frequency range	5…862 MHz | 950…2400 MHz
Max. LNB current	1500 mA
Isolation V | H	>30 dB
Isolation TERR | SAT	30 dB
Subscriber ports	
Number	8
Switch commands	13/18 V, 0/22 kHz
Tap loss TERR	23 dB ±2 dB
Max. output level SAT (3rd order SAT EN 50083□3 35dB KMA, 2 sender test method)	102 dBµV
Current consumption per port (without LNB supply)	< 35 mA
Trunk outputs	
Number	5
Through loss TERR	2 dB ±1 dB
Through loss SAT	2 dB ±1 dB
Connectors	
Connector type	F
General	
Operating temperature range (acc. to EN 60065)	-20…+50°C
Equipotential bonding connection	4 mm²
Dimensions (W × H × D) appr.	137 x 112 x 63 mm
Weight	0.400 kg
IP code	IP20

Example of use

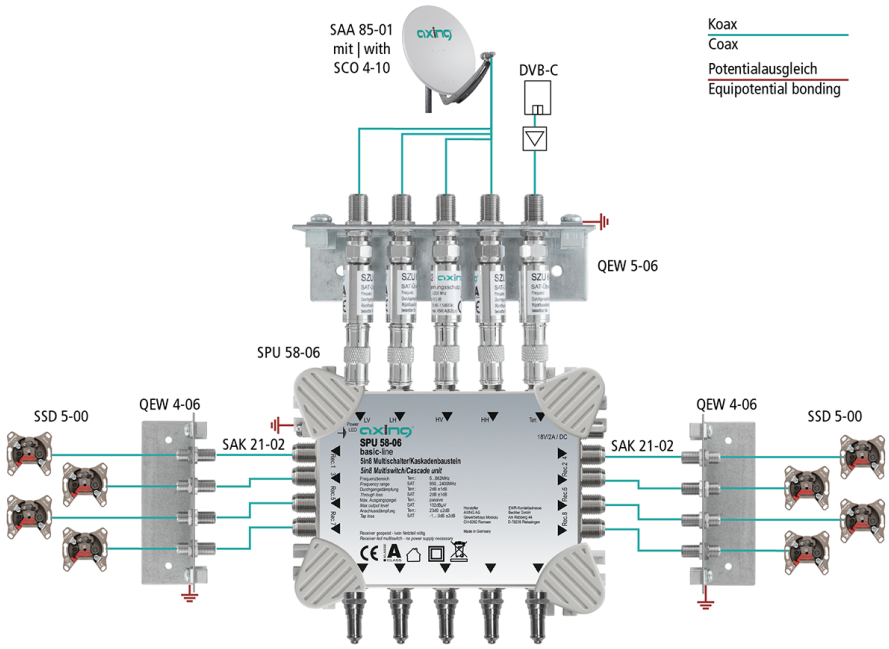

Suitable products

SZU 99-06 Switching mode power supply 18 VDC/2 A
QEW 5-06 Earthing angle | single-rowed | surge protection
QEW 4-06 Earthing angle | single-rowed
SAK 21-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m
SAK 41-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m
CFA 11-00 Terminating resistor | 75 Ohm | DC isolated
CFA 4-01 Adapter F | F | Quickfix