


SPU 1332-06 Multiswitch stand-alone/cascade unit | 13 in 32 | basic-line

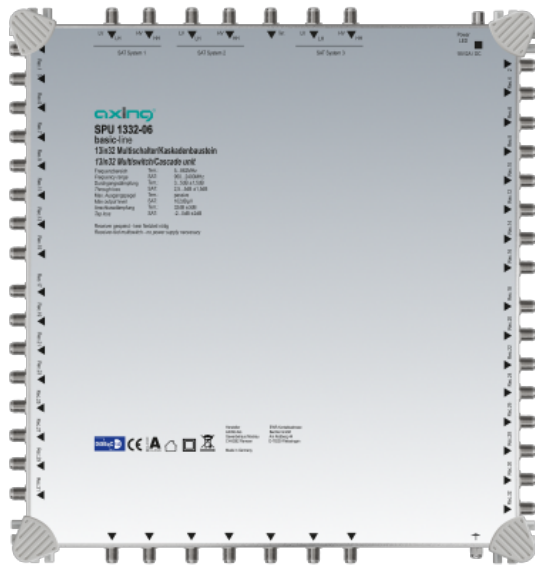

- ✓ For up to 32 subscribers
- ✓ Subscriber ports SAT active, terrestrial passive
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Powered by ext. power supply SZU 99-06 (not included in delivery) or via the SAT-IF trunk lines
- ✓ Cascadable - Cascade outputs must be terminated with DC-isolated 75 Ohm terminating resistors (e.g. CFA 11-00, not included in delivery)

Order information


Type	SPU 1332-06
Order no.	SPU133206
GTIN	7611682005479
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs	
Number	13
Frequency range	5...862 MHz   950...2400 MHz
Max. LNB current	1500 mA
Isolation V   H	>30 dB
Isolation TERR   SAT	30 dB
Subscriber ports	
Number	32
Switch commands	13/18 V, 0/22 kHz, DiSEqC 1.0
Tap loss TERR	32 dB ±3 dB
Tap loss SAT	2...0 dB ±2 dB
Max. output level SAT (3rd order SAT EN 50083 3 35dB KMA, 2 sender test method)	102 dBµV
Current consumption per port (without LNB supply)	< 35 mA
Trunk outputs	
Number	13
Through loss TERR	3...5 dB ±1.5 dB
Through loss SAT	2.5...5 dB ±1.5 dB
Connectors	
Connector type	F
General	
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	291 × 308 × 63 mm
Weight	1.440 kg
IP code	IP20

## Example of use

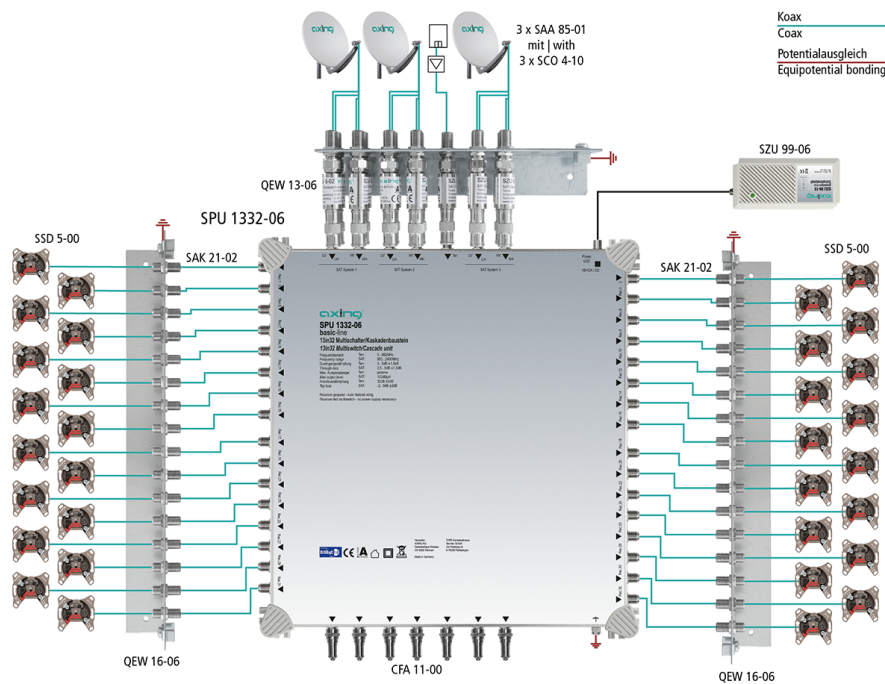

## Suitable products

[QEW 13-06 Earthing angle | two-rowed | surge protection](#)

[QEW 16-06 Earthing angle | single-rowed](#)

[SAK 21-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m](#)

[SAK 41-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m](#)

[CFA 11-00 Terminating resistor | 75 Ohm | DC isolated](#)

[CFA 4-01 Adapter F/F | Quickfix](#)