

TZU 40-05 RF and EoC inserter



- ✓ To feed in RF modulated IP signals
- ✓ 5...1218 MHz | 258...1218 MHz (with high pass filter 204 MHz)
- ✓ 4 dB EoC loss between connector "IN2" and connector "COM"
- ✓ 4 dB through loss between connector „IN1" and connector „COM"
- ✓ Connector 1: IN1
- ✓ Connector 2: IN2 (EoC)
- ✓ Connector 3: COM

Order information

Type	TZU 40-05
Order no.	TZU04005
GTIN	7611682008142
PE	1
VE	1
EU customs tariff number	85291080




Technical data

Application	RF/EoC
Frequency range	5...1218 MHz 258...1218 MHz
Through loss	4 dB
EoC loss	4 dB
Connectors	
Connector 1	F-female
Connector 2	F-female
Connector 3	F-male, quickfix
General	
Dimensions (W x H x D) appr.	55 x 34 x 18 mm
Weight	0,029 kg

Example of use

HDMI
LAN
Potentialausgleich | Stromversorgung
Equipotential bonding | Power supply

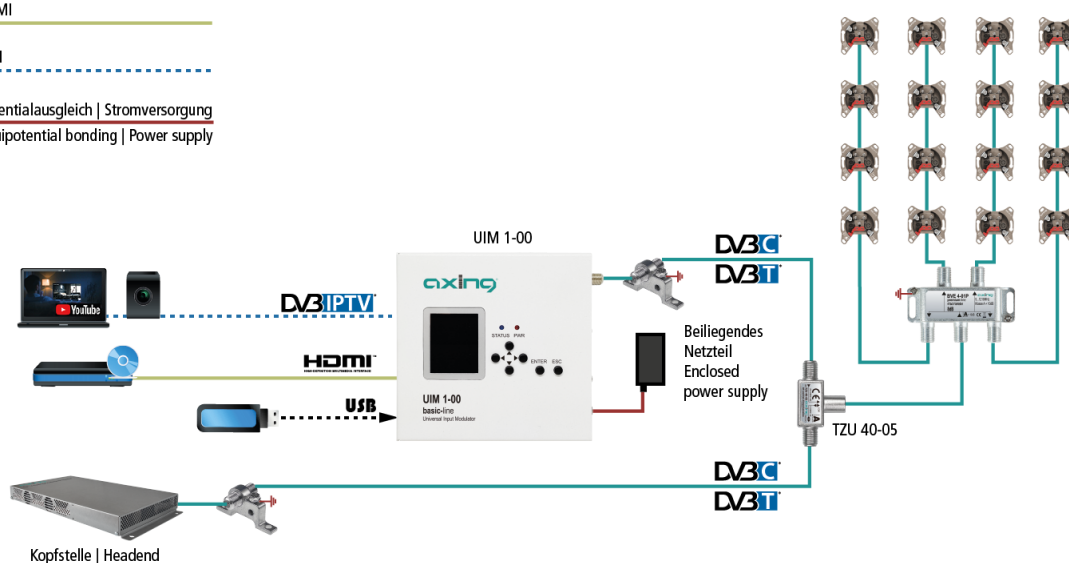

Suitable products

[EOC 30-01 Ethernet over Coax | Master | 1800 Mbps](#)

[EOC 30-02 Ethernet over Coax | Endpoint | WiFi](#)

[EOC 30-03 Ethernet over Coax | Endpoint](#)

[EOC 30-21 Ethernet over Coax | Dual-Master | 1800 Mbps](#)

[EOC 1-32 Ethernet over Coax | Peer-to-Peer | 1800 Mbps](#)

[EOC 2-32 Ethernet over Coax | Peer-to-Peer | 1800 Mbps | WiFi](#)