

BAB 10-18 1-way tap | 18 dB | 5...1006 MHz | housing design 01

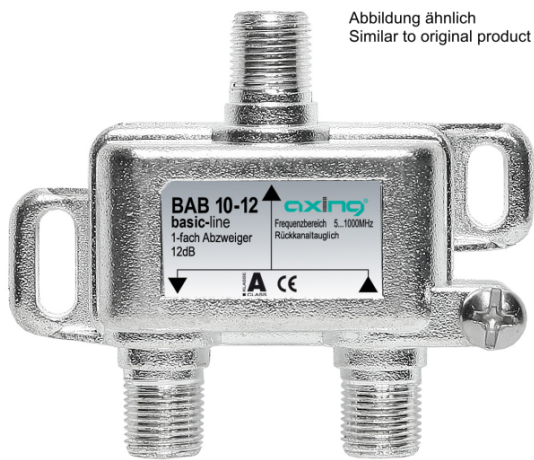


Abbildung ähnlich
Similar to original product

- ✓ High return loss
- ✓ For multimedia-use
- ✓ Inputs and outputs hum-suppressed

Order information

Type	BAB 10-18
Order no.	BAB01018
GTIN	7611682001006
PE	1
VE	1
EU customs tariff number	85291080



Technical data

Frequency range	5...1006 MHz
Screening factor acc. to EN 50083-2	Class A + 10 dB
Taps	1-fach
Tap loss	18 ±1 dB @ 5 ... 1006 MHz
Through loss	≤ 0.8 dB @ 5 ... 40 MHz ≤ 1.0 dB @ 40 ... 470 MHz ≤ 1.2 dB @ 470 ... 862 MHz ≤ 1.5 dB @ 862 ... 1006 MHz
RF connectors	
Type	F-Buchse (IEC 61169-24)
Connectors	
Connector type	F
Impedance	75 Ohm
Return loss	≥ 20 dB
General	
Operating temperature range	−15 °C ... +60 °C
Dimensions (W × H × D) appr.	42 × 52 × 17 mm
Weight	0.058 kg
IP code	IP67