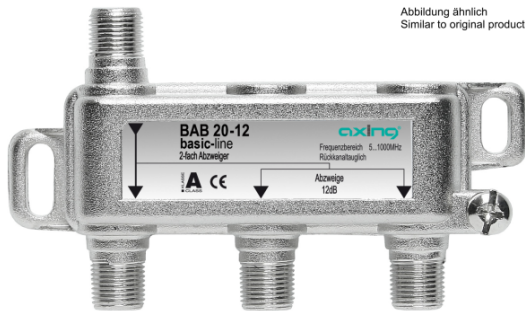


**BAB 20-16 2-way tap | 16 dB | 5...1006 MHz | housing design 01**


- ✓ High return loss
- ✓ For multimedia-use
- ✓ Inputs and outputs hum-suppressed

**Order information**

|                          |               |
|--------------------------|---------------|
| Type                     | BAB 20-16     |
| Order no.                | BAB02016      |
| GTIN                     | 7611682001051 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291080      |


**Technical data**

|                                     |   |
|-------------------------------------|---|
| Frequency range                     | 5...1006 MHz  |
| Screening factor acc. to EN 50083-2 | Class A + 10 dB   |
| Taps                                | 2-fach  |
| Tap loss                            | 16 ±1 dB @ 5 ... 1006 MHz   |
| Through loss                        | ≤ 1.2 dB @ 5 ... 40 MHz<br>≤ 1.2 dB @ 40 ... 470 MHz<br>≤ 1.7 dB @ 470 ... 862 MHz<br>≤ 1.5 dB @ 862 ... 1006 MHz |
| <b>RF connectors</b>                |   |
| Type                                | F-Buchse (IEC 61169-24)   |
| <b>Connectors</b>                   |   |
| Connector type                      | F   |
| Impedance                           | 75 Ohm  |
| Return loss                         | ≥ 21  |
| <b>General</b>                      |   |
| Operating temperature range         | -15 °C ... +60 °C   |
| Dimensions (W × H × D) appr.        | 89 × 55 × 30 mm   |
| Weight                              | 0.079 kg  |
| IP code                             | IP67  |