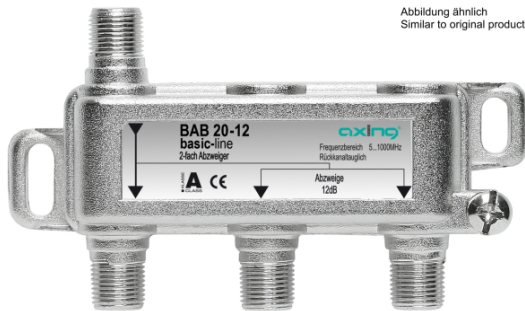


**BAB 20-20 2-way tap | 20 dB | 5...1006 MHz | housing design 01**

 Abbildung ähnlich  
Similar to original product

- ✓ High return loss
- ✓ For multimedia-use
- ✓ Inputs and outputs hum-suppressed

**Order information**

Type	BAB 20-20
Order no.	BAB02020
GTIN	7611682001075
PE	1
VE	1
EU customs tariff number	85291080


**Technical data**

Frequency range	5...1006 MHz
Screening factor acc. to EN 50083-2	Class A + 10 dB
Taps	2-fach
Tap loss	20 ±1 dB @ 5 ... 1006 MHz
Through loss	≤ 0.8 dB @ 5 ... 40 MHz ≤ 0.8 dB @ 40 ... 470 MHz ≤ 1.0 dB @ 470 ... 862 MHz ≤ 1.3 dB @ 862 ... 1006 MHz
<b>RF connectors</b>	
Type	F-Buchse (IEC 61169-24)
<b>Connectors</b>	
Connector type	F
Impedance	75 Ohm
Return loss	≥ 17
<b>General</b>	
Operating temperature range	-15 °C ... +60 °C
Dimensions (W × H × D) appr.	89 × 55 × 30 mm
Weight	0.079 kg
IP code	IP67