


## BSD 21-01 Extended wideband end outlet 5...2200 MHz | CATV | SAT | DC power pass

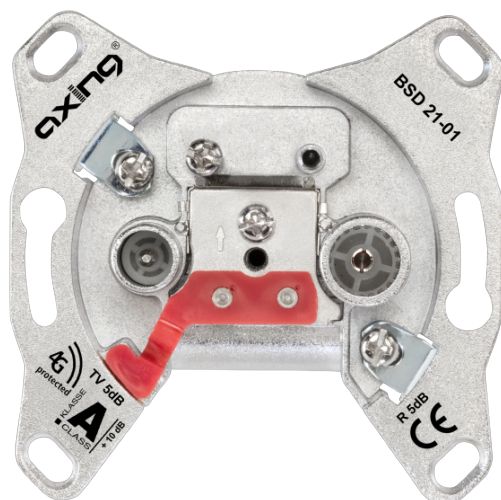

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for broadband return path
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Surface treated

### Order information

Type	BSD 21-01
Order no.	BSD02101
GTIN	7611682002423
PE	1
VE	1
EU customs tariff number	85291095



### Technical data

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Tap method	Ferrite splitter
Trunk line	
Frequency range input	5...2200 MHz
Isolation internal	≥ 15 dB
Suitable cables (Inner conductor   outer diameter)	0.63...1.13 mm   4.70...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	5...2200 MHz
Tap loss	5 dB ±1.5 dB
DC power pass to trunk	yes
Radio connector	
Connector type	IEC-female
Frequency range	5...2200 MHz
Tap loss	5 dB ±1.5 dB
General	
Dimensions (W × H × D) appr.	68 × 68 × 35 mm
Weight	0.092 kg

### Suitable products

[TZU 21-65 Plug-on adapter | Multimedia](#)  
[TZU 2-00 Cover plate | TV/R | single piece](#)  
[TZU 1-00 Surface frame](#)  
[TZU 2-10 Cover plate | TV/R | two-parts](#)  
[TZU 1-10 Surface frame](#)