
# BSD 21-14 Extended wideband loop-through outlet 14 dB | 5…2200 MHz | CATV

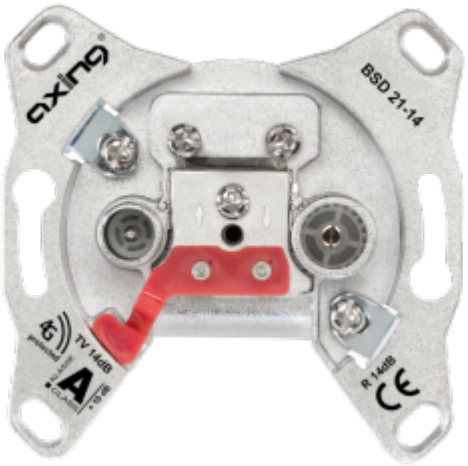


- ✔ Class A (+10 dB) according to EN 50083-2
- ✔ Suitable for broadband return path
- ✔ Easy to install
- ✔ Stripping length 8/13 mm
- ✔ Surface treated

## Order information

| | |
|---|---|
| **Type** | BSD 21-14 |
| **Order no.** | BSD02114 |
| **GTIN** | 7611682002461 |
| **PE** | 1 |
| **VE** | 1 |
| **EU customs tariff number** | 85291095 |

## Technical data

| | |
|---|---|
| **Screening factor acc. to EN 50083-2** | Class A (+ 10 dB) |
| **Tap method** | Directional couple + ferrite splitter |
| **Trunk line** | |
| **Frequency range input** | 5…2200 MHz |
| **Through loss** | ≤ 1,5 dB @ 5…862 MHz<br>≤ 2,5 dB @ 862…2200 MHz |
| **Isolation internal** | ≥ 15 dB |
| **Frequency range output** | 5…2200 MHz |
| **Suitable cables (Inner conductor \| outer diameter)** | 0.63…1.13 mm \| 4.70…7.35 mm |
| **TV connector** | |
| **Connector type** | IEC-male |
| **Frequency range** | 5…2200 MHz |
| **Tap loss** | 14 dB ±1.5 dB |
| **Radio connector** | |
| **Connector type** | IEC-female |
| **Frequency range** | 5…2200 MHz |
| **Tap loss** | 14 dB ±1.5 dB |
| **General** | |
| **Dimensions (W × H × D) appr.** | 68 × 68 × 35 mm |
| **Weight** | 0.092 kg |

## Suitable products

TZU 21-65 Plug-on adapter | Multimedia
TZU 2-00 Cover plate | TV/R | single piece
TZU 1-00 Surface frame
TZU 2-10 Cover plate | TV/R | two-parts
TZU 1-10 Surface frame
TZU 3-00 Terminating resistor