


## BSD 40-08 CATV/SAT loop-through outlet 8 dB | 5...2200 MHz

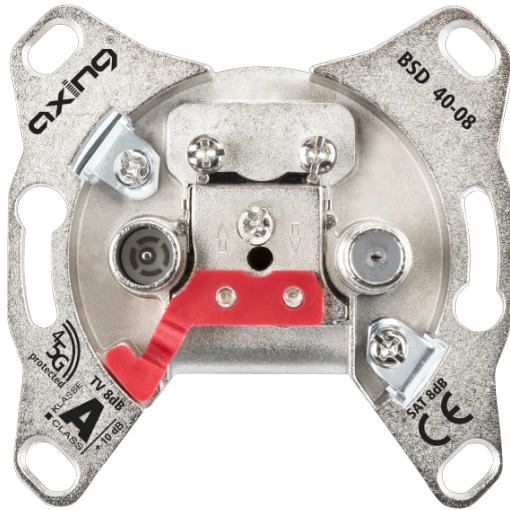

- ✓ Class A + 10 dB
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Suitable for Unicable I (EN50494) and Unicable II (EN50607)
- ✓ Surface treated
- ✓ SAT = F-female connector
- ✓ TV/radio = IEC-male connector

### Order information

Type	BSD 40-08
Order no.	BSD04008
GTIN	7611682400069
PE	1
VE	1
EU customs tariff number	85291095



### Technical data

Screening factor acc. to EN 50083-2	Klasse A (+10 dB)
Trunk line	
Frequency range input	5 ... 2200 MHz
Through loss	3.8 dB ±0.7 dB
Suitable cables (inner conductor   outer conductor   outer diameter)	0.4 ... 1.13 mm   3.5 ... 6.0 mm   4.70 ... 7.35 mm
TV connector	
Connector type	IEC male
Frequency range	5 ... 862 MHz
Tap loss	8 dB ±1 dB
SAT connector	
Connector type	F female
Frequency range	950 ... 2200 MHz
Tap loss	8 dB ±1 dB
DC power pass to trunk	Yes
General	
Dimensions (W × H × D) appr.	68 × 68 × 39 mm
Weight	0.1 kg

### Suitable products

[TZU 2-02 Cover plate | TV/SAT| single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 3-01 Terminating resistor, DC-isolated](#)