


## BSD 963-14N Multimedia loop-through outlet 14 dB | 5...1006 MHz | CATV | DATA

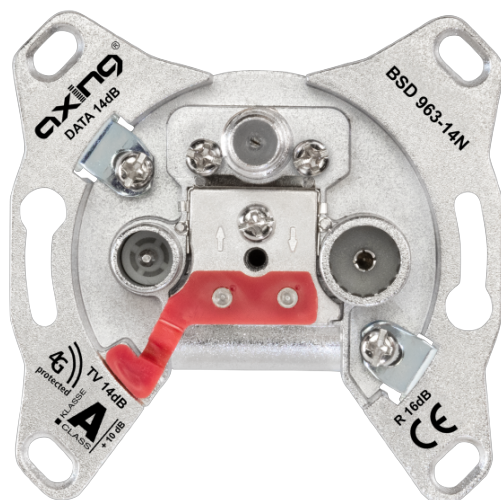

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for broadband return path
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F socket
- ✓ Surface treaded
- ✓ Vodafone listed

### Order information

|                          |               |
|--------------------------|---------------|
| Type                     | BSD 963-14N   |
| Order no.                | BSD96314N     |
| GTIN                     | 7611682001549 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291095      |



### Technical data

|                                                    |                                                  |
|----------------------------------------------------|--------------------------------------------------|
| Screening factor acc. to EN 50083-2                | Class A (+ 10 dB)                                |
| <b>Trunk line</b>                                  |                                                  |
| Frequency range input                              | 5...1006 MHz                                     |
| Through loss                                       | ≤ 2.5 dB                                         |
| Frequency range output                             | 5...1006 MHz                                     |
| Suitable cables (Inner conductor   outer diameter) | 0.63...1.13 mm   4.70...7.35 mm                  |
| <b>TV connector</b>                                |                                                  |
| Connector type                                     | IEC-male                                         |
| Frequency range                                    | 109...1006 MHz                                   |
| Tap loss                                           | 14 dB ±1 dB                                      |
| <b>Radio connector</b>                             |                                                  |
| Connector type                                     | IEC-female                                       |
| Frequency range                                    | 87.5...125 MHz                                   |
| Tap loss                                           | 16 dB ±1.5 dB                                    |
| <b>DATA connector</b>                              |                                                  |
| Connector type                                     | F-female                                         |
| Frequency range                                    | 5...1006 MHz                                     |
| Tap loss                                           | 14 dB ±1 dB                                      |
| Isolation TV↔DATA                                  | ≥ 70 dB @ 5...65 MHz<br>≥ 30 dB @ 109...1006 MHz |
| <b>General</b>                                     |                                                  |
| Dimensions (W × H × D) appr.                       | 68 × 68 × 39 mm                                  |
| Weight                                             | 0.100 kg                                         |

### Suitable products

[SZU 2-01 Cover plate | TV/R/DATA | single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 3-01 Terminating resistor, DC-isolated](#)