


## BSD 967-20X Multimedia loop-through outlet 20 dB | 5 ... 1800 MHz | CATV | DATA

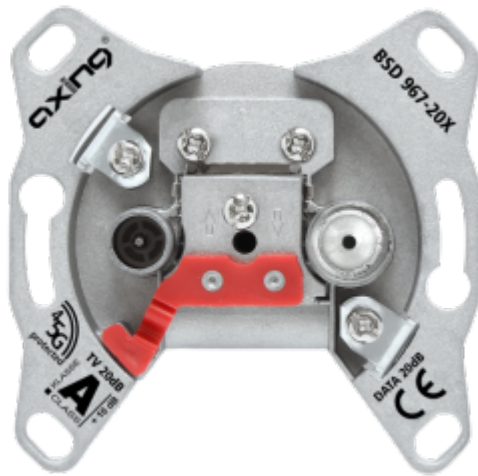

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ For DOCSIS 3.1/4.0 applications
- ✓ Suitable for broadband return path
- ✓ High overvoltage protection
- ✓ High intermodulation immunity ( $\leq 115$  dBc)
- ✓ TV port IEC male
- ✓ DATA port F female
- ✓ Vodafone listed according to VF TS 142

### Order information

Type	BSD 967-20X
Order no.	BSD96720X
GTIN	7611682008357
PE	1
VE	1
EU customs tariff number	85291095



### Technical data

Screening factor acc. to EN 50083-2	Class A (+10 dB)
Trunk line	
Frequency range input	5 ... 1800 MHz
Through loss	$\leq 1,0 \dots 2,5$ dB
Frequency range output	5 ... 1800 MHz
Suitable cables (inner conductor   outer conductor   outer diameter)	0.4 ... 1.13 mm   3.5 ... 6.0 mm   4.70 ... 7.35 mm
TV connector	
Connector type	IEC male
Frequency range	258 ... 862 MHz
Tap loss	20 dB $\pm 1$ dB
DATA connector	
Connector type	F female
Frequency range	5 ... 1800 MHz
Tap loss	20 dB $\pm 1$ dB
Isolation TV@DATA	$\geq 60$ dB @ 5 ... 204 MHz $\geq 25$ dB @ 258 ... 1800 MHz
General	
Dimensions (W x H x D) appr.	68 x 68 x 39 mm
Weight	0.092 kg

### Suitable products

[TZU 2-01 Cover plate | TV/DATA | single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 2-11 Cover plate | TV/DATA | two-parts](#)

[TZU 1-10 Surface frame](#)