

BVS 12-69N CATV amplifier 20 dB | 100 dB $\mu$ V CSO/CTB

- ✓ KDG 1 TS 140: B(1.2)
- ✓ Downstream 85...1006 MHz
- ✓ Adjustable attenuator and equalizer
- ✓ Upstream 5...65 MHz
- ✓ Adjustable attenuator
- ✓ Al-die-cast/plastic housing
- ✓ Vodafone listed

## Order information

Type	BVS 12-69N
Order no.	BVS01269N
GTIN	7611682004816
PE	1
VE	1
EU customs tariff number	85437030



## Technical data

EMC	according to EN 50083-2, class A
Classification according to KDG 1 TS 140	B(1.2)
Downstream	
Frequency range	85...1006 MHz
Gain	17...20 dB
Max. output level CSO/CTB (CENELEC raster, 41 channels, 60 dB IMA)	100/98 dB $\mu$ V*
Attenuation: continuously adjustable	0...20 dB
Equalization: continuously adjustable	0...18 dB
Return loss	$\geq 14$ dB (-1.5 dB/Octave)
Noise figure typ.	7 dB
Upstream	
Frequency range	5...65 MHz
Gain	17...20 dB
Attenuation: continuously adjustable	0...20 dB
RF connectors	
Type	F-female
General	
Operating temperature range (acc. to EN 60065)	-20...+50°C
Power supply	230 VAC / 50 Hz
Power indicator	LED
Power consumption	6 W
Equipotential bonding connection	4 mm <sup>2</sup>
Dimensions (W x H x D) appr.	192 x 89 x 40 mm
Weight	0.360 kg
IP code	IP20
Comments	* @ 3dB slope, 100 dB $\mu$ V   @ flat 0dB slope, 98 dB $\mu$ V

## Example of use

Up- und Downstream (Koax)

Up- und Downstream (Coax)

Potentialausgleich

Equipotential bonding

Antennensteckdosen = BSD 963-11N

Erdungswinkel = QEW 5-50

Verteiler = BVE 4-01P


Koaxialkabel = SKB 94-0x

Antenna wall outlets = BSD 963-11N

Earthing angles = QEW 5-50

Splitters = BVE 4-01P

Coaxial cable = SKB 94-0x

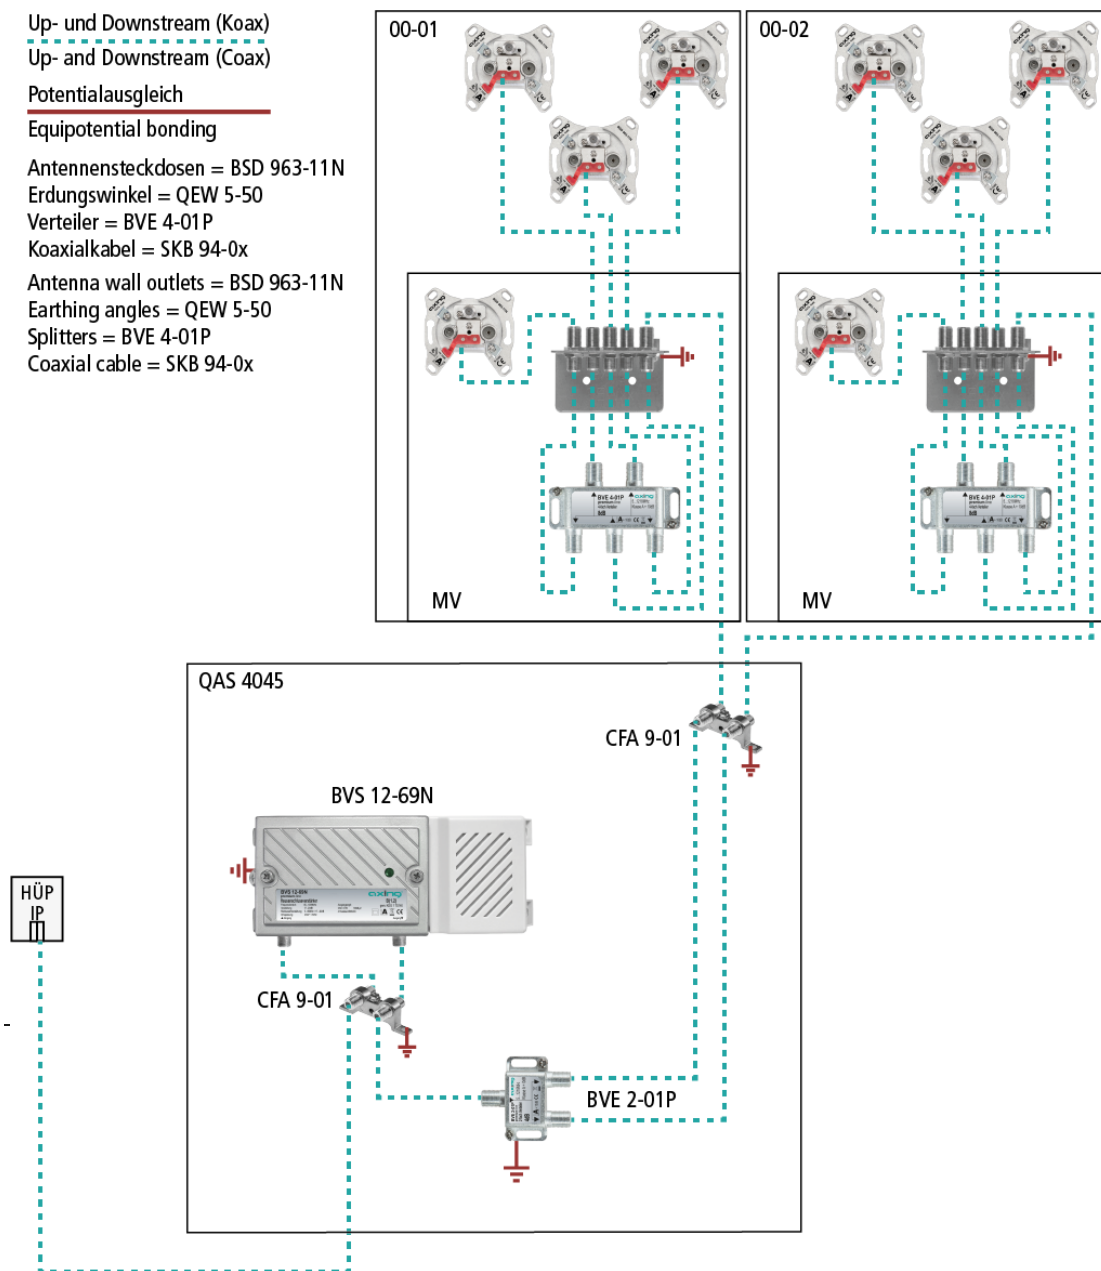

## Suitable products

QEW 5-50 Earthing angle | 5-way, two-rowed  
 QEW 6-50 Earthing angle | 6-way, two-rowed  
 QEW 7-50 Earthing angle | 7-way, two-rowed  
 QEW 8-50 Earthing angle | 8-way, two-rowed  
 QEW 9-50 Earthing angle | 9-way, two-rowed  
 QEW 11-50 Earthing angle | 11-way, two-rowed  
 QEW 13-50 Earthing angle | 13-way, two-rowed  
 QEW 17-50 Earthing angle | 17-way, two-rowed  
 QEW 25-50 Earthing angle | 25-way, three-rowed