BZU 10-02 CATV signal tester digital



- ✔ Easy-to-use, small level tester for digital CATV systems
- ✔ Displays the average level of a single channel within 254…294 MHz or 398...438 MHz
- ✔ Alternatively, display of the sum total level over the entire bandwidth
- ✔ Including: Patch cable (F/F, 30 cm) and Adapter (IEC female/F-female)

Order information

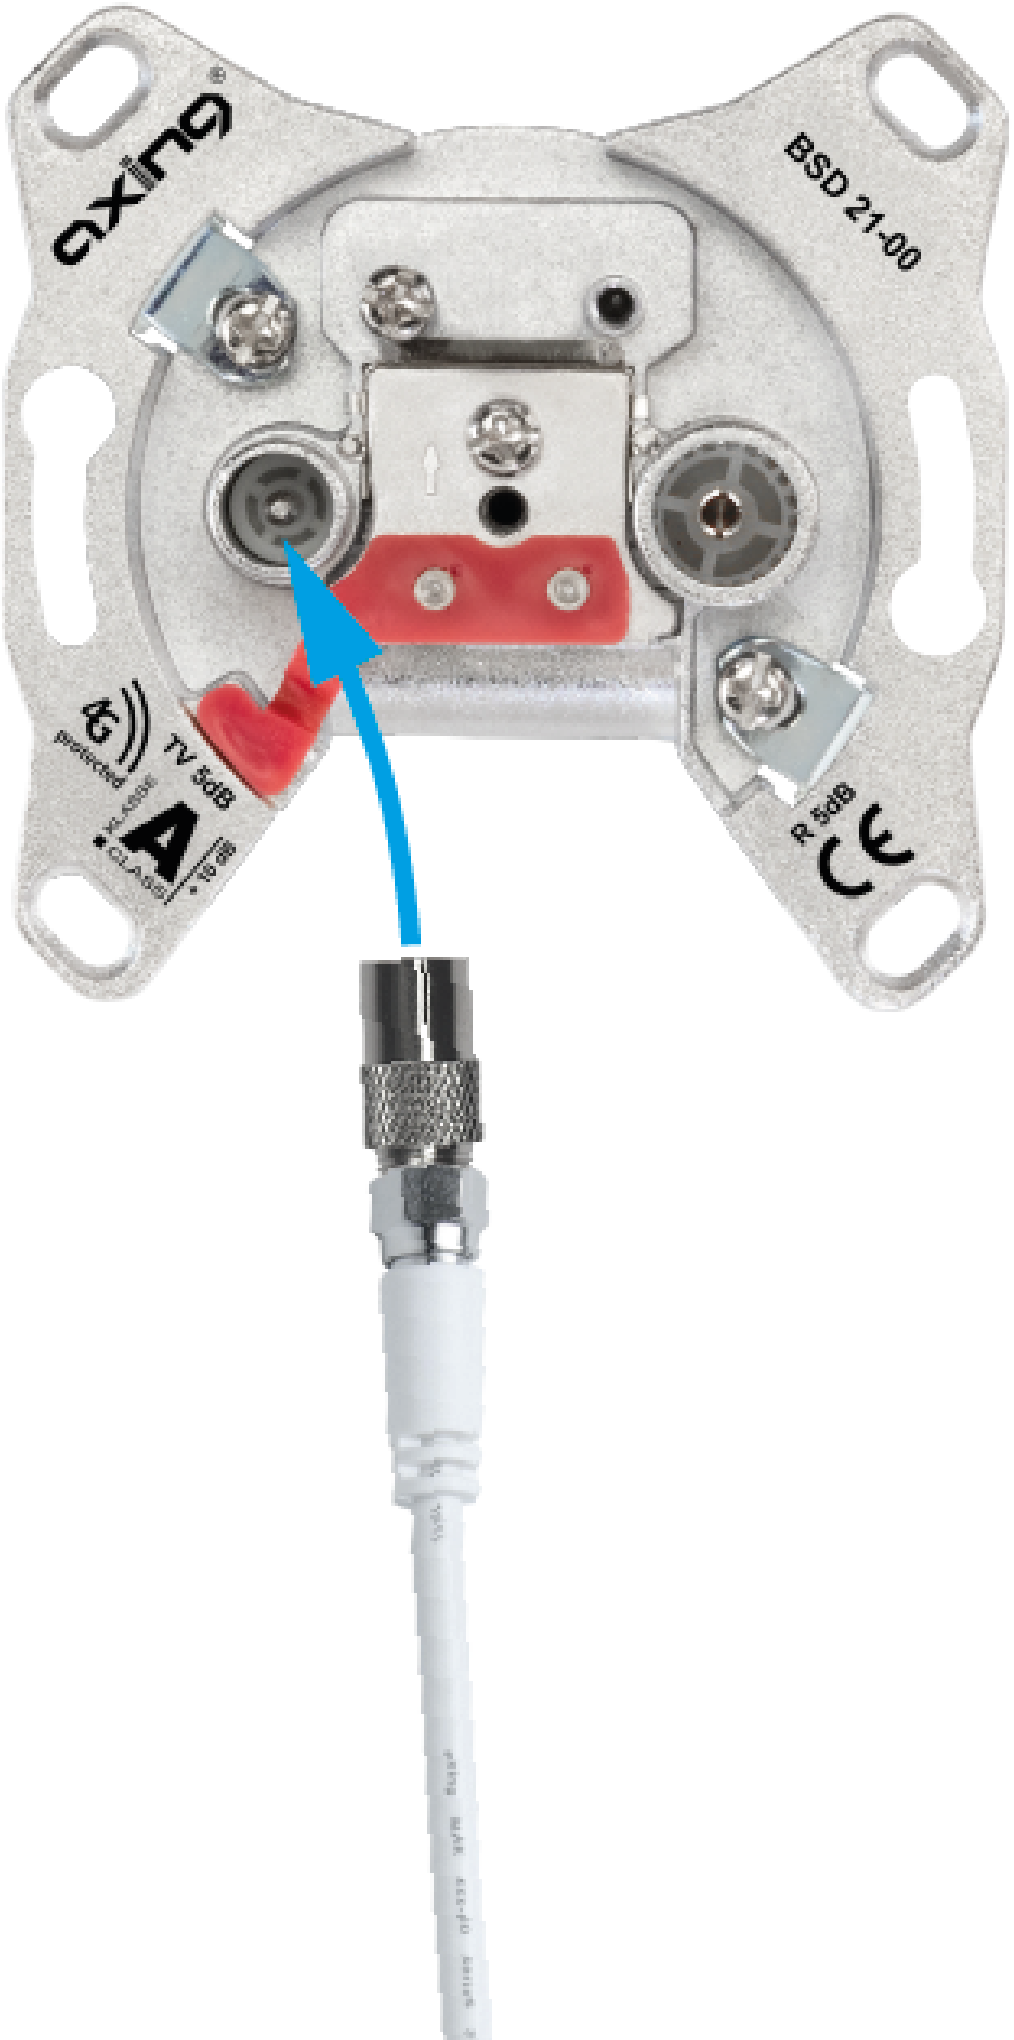
Type	BZU 10-02
Order no.	BZU01002
GTIN	7611682007824
PE	1
VE	1
EU customs tariff number	85043180

CE

Technical data

Input	
Frequency range	254…294 MHz (D258...D290 | S15…S19) @ VHF selective 398…438 MHz (D402…D434 | S33…S37) @ UHF selective 5…2700 MHz @ broadband
Impedance	75 Ω
Return loss	> 10 dB
Level measurement	
Range	60…105 dBµV selectiv 80…125 dBµV broadband
Digital measurements	
Bandwidth	5 dBµV +/- 2.5 dB
Connectors	
RF Input	F-female
General	
Operating voltage	9 VDC (PP3) *
Power consumption	630 mW (max.)
Current consumption	70 mA (max.)
Current consumption in standby	10 µA (max.)
Dimensions (W × H × D) appr.	60 x 120 x 26 mm
Weight	0.110 kg
Comments	* 9 V battery not included in delivery

Example of use


axing
BSD 21-00
TV 5dB
R 5dB
CLASS A