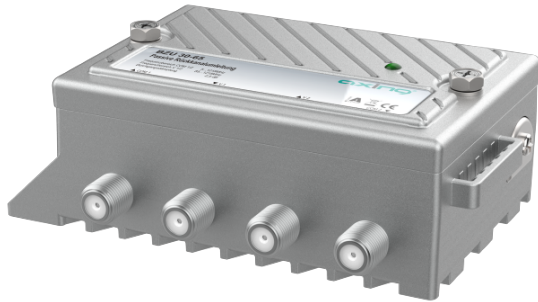


BZU 30-65 Passive return channel bypass 5 ... 65 MHz

- ✓ EoC signals 5 ... 65 MHz can be routed passively around a broadband amplifier
- ✓ Separates and recombines the frequency ranges 5 ... 65 MHz and 85 ... 1218 MHz

Order information

Type	BZU 30-65
Order no.	BZU03065
GTIN	7611682007091
PE	1
VE	1
EU customs tariff number	85439000

**Technical data**

Screening factor acc. to EN 50083-2	Class A
Frequency range	5...1218 MHz @ COM1/2 85...1218 MHz @ V1/2
Through loss	2.5 dB
Isolation	≥ 35 dB
Connectors	
Connector type	F-female
Return loss	≥ 14 dB (–1 dB/Oct.)
General	
Operating temperature range	–20 °C ... +50 °C
Dimensions (W × H × D) appr.	123 × 89 × 44 mm
Weight	0.262 kg
IP code	IP54

Example of use

