

MG 1-00 DVB-TV Meter



- ✓ Easy start thanks to DVB-T2 and SAT wizard, intuitive operation
- ✓ Ideal for use by installers, electricians and on the construction site
- ✓ 7-inch high-resolution touch display (800 × 480 px)
- ✓ Including display of the TV picture by MPEG4 decoder (H.264)
- ✓ Very good legibility even in poor lighting conditions
- ✓ Measuring ranges DVB-T/-T2/-T2 Lite, DVB-C/-C2 and DVB-S/-S2 (incl. UNICABLE I and II as well as Wideband)
- ✓ Extendable to DVB-S2X with software extension MGS 1-00
- ✓ Frequency range SAT 200 ... 2400 MHz (Wideband)
- ✓ Frequency range DVB-T/T2/CATV 5 ... 1005 MHz
- ✓ Import of an individual frequency plan possible
- ✓ Level measuring range 20 ... 120 dBµV
- ✓ Measurements: level (also analogue), BER, MER, packet error (PER), link margin, constellation diagram
- ✓ Including spectrum analyser with full-band display or stepwise adjustment of the span
- ✓ DiSEqC Version 1.2
- ✓ Supply voltages 13/18 V for SAT, 5/13/18/24 V for DVB-T2 and CATV
- ✓ Network interface RJ45 (10/100baseT), USB
- ✓ Compact design, stable housing with robust bumpers
- ✓ Built-in lithium-ion battery with 94 Wh for up to 5 hours operating time (depending on the use and a remote power supply for LNB or antenna)
- ✓ Incl. F/F-adaptor, charging unit, USB flash drive and carrying bag MGZ 1-00
- ✓ User-friendly generation of measurement protocols thanks to the AXING-MCombiner software tool included in delivery

Order information

Type	MG 1-00
Order no.	MG00100
GTIN	7611682007916
PE	1
VE	1
EU customs tariff number	85043180



Technical data


Input	
Frequency range	5 ... 1005 MHz @ CATV / TERR 200 ... 2400 MHz @ SAT
LNB-Type	C   Ku   Ku WIDEBAND (LO adjustable)
Level measurement	
Range	20 ... 120 dBµV
Units	dBµV   dBmV   dBm
Accuracy	± 2 dB ± 0.05 dB/°C
Resolution	0.1 dB
Standards	DVB-T/T2/T2Lite   DVB-C/C2   BG   DK   I   L   MN   DAB   FM carrier @ CATV / TERR DVB-S/S2/S2X*   PAL   SECAM   NTSC carrier @ SAT
Digital measurements	
Packet errors and link margin (LKM)	Yes
Modulation Error Rate (MER)	15 ... 35 dB @ DVB-T 15 ... 35 dB @ DVB-T2/T2lite 20 ... 40 dB @ DVB-C (J83.A) 25 ... 35 dB @ DVB-C2 0 ... 20 dB @ DVB-S 0 ... 20 dB @ DVB-S2 0 ... 20 dB @ DVB-S2X*
Sensitivity	35 dBµV @ DVB-T 35 dBµV @ DVB-T2/T2lite < 55 dBµV @ DVB-C (J83.A) < 55 dBµV @ DVB-C2 47 dBµV @ DVB-S 47 dBµV @ DVB-S2 47 dBµV @ DVB-S2X*
Bandwidth	6   7   8 MHz @ DVB-T 1.7   5   6   7   8 MHz @ DVB-T2/T2lite 6   8 MHz @ DVB-C2
Mode	PLP and data slice, simple or multiple @ DVB-C2
FFT	2k   8k @ DVB-T 1k   2k   4k   8k   16k   32k + Band Extension @ DVB-T2/T2lite

Modulation type	QPSK, 16 - 64QAM @ DVB-T QPSK, 16 - 256QAM @ DVB-T2/T2lite 16, 32, 64, 128, 256QAM @ DVB-C (J83.A) 16, 64, 256, 1024, 4096QAM @ DVB-C2 QPSK @ DVB-S QPSK, 8PSK, 16, 32APSK @ DVB-S2 QPSK, 8PSK, 8, 16, 32APSK-L @ DVB-S2X*
Symbol rate	1 ... 7.224 MS/s @ DVB-C (J83.A) 1 ... 50 MS/s @ DVB-S 1 ... 50 MS/s @ DVB-S2 1 ... 50 MS/s @ DVB-S2X*
HP/LP – PLP – Data Slice	HP/LP @ DVB-T PLP @ DVB-T2/T2lite PLP + Data Slice @ DVB-C2
Multistream	Stream selection 0 ... 255 (ISI) PLS descrambling (Gold code) @ DVB-S2 Stream selection 0 ... 255 (ISI) PLS descrambling (Gold code) @ DVB-S2X*
<b>Spectrum analysis</b>	
Span	1 MHz to full span in 1, 2, 5 steps
Sweep	100 ... 1000 ms
Filters	1.6 kHz   3.2 kHz   8 kHz   16 kHz   32 kHz   80 kHz   160 kHz   320 kHz   800 kHz   1.6 MHz   3.2 MHz
Attenuation	0 ... 55 dB, in 5 dB steps (automatic)
Display range / dynamic	60 dB (10 dB/div)
Remote supply/control	
Supply	5/13/18/24 V   500 mA max. (300 mA @ 24V) @ DVB-T/T2 13 / 18V   500 mA max. @ DVB-S/S2
DiSEqC	DiSEqC 2.1   Dish Rotor Control   committed & uncommitted Switches
DCSS	Max. 8 user bands @ EN 50494 (UNICABLE I) Max. 32 user bands @ EN 50607 (UNICABLE II)
<b>Audio/Video</b>	
Audiocodecs	MPEG-1   MPEG-2   AAC   HE AAC   Dolby® Digital   Dolby® Digital Plus
Videocodecs	MPEG-2 SD und MPEG-4 HD (H.264)
Service tables	SDT   LCN
<b>Antenna check mode</b>	
Memory	10 places/stations @ DVB-T/T2 30 satellites, with European database loaded @ DVB-S/S2
Check	4** channels @ DVB-T/T2 4** transponders @ DVB-S/S2
<b>Interfaces</b>	
Ethernet connectors (LAN)	1 × RJ 45
Ethernet standards	IEEE 802.3 10/100 Base-T
USB	USB-A / V1.1 (Full Speed)
<b>Connectors</b>	
RF Input	F-male (F-female/F-female adaptor mounted)   75 Ohms
Max. permitted voltage	50 VDC, 33 Veff / 50 Hz
Analogue video input	Jack 3.5 mm   4 contacts
Level	Video 1 Vpp max. / Audio 10 kOhm
Standards	PAL   SECAM   NTSC
Power supply	Jack 5.5 mm (max 1 A)
<b>General</b>	
Display	Color LCD TFT   7 inches   16:9   backlight (500 cd/m2)   resolution 800 x 480   capacitive touch screen
Operating voltage	15 VDC
Battery	Lithium Ion with 94 Wh (non-removable)***
Charging time	6:45 h:min 80%   9:30 h:min 100%
Operating time	CATV/TERR: 5 h   SAT: 3 h (depending on use case)
Operating temperature range	-5 ... +40 °C
Storage temperature range	-10 ... +60 °C
EMC and safety	NF-EN 61326-1   NF-EN 61326-2   NF-EN 61010-1
Dimensions (W × H × D) appr.	280 x 300 x 70 mm
Weight	1.350 kg
<b>External accessories</b>	
Plug-in power supply	110/230 VAC   15 VDC / 1 A
<b>General</b>	

## Comments

\* DVB-S2X only with software extension MGS 1-00  
 \*\* Can be changed by the user  
 \*\*\* From serial number #6000 upwards

## Example of use

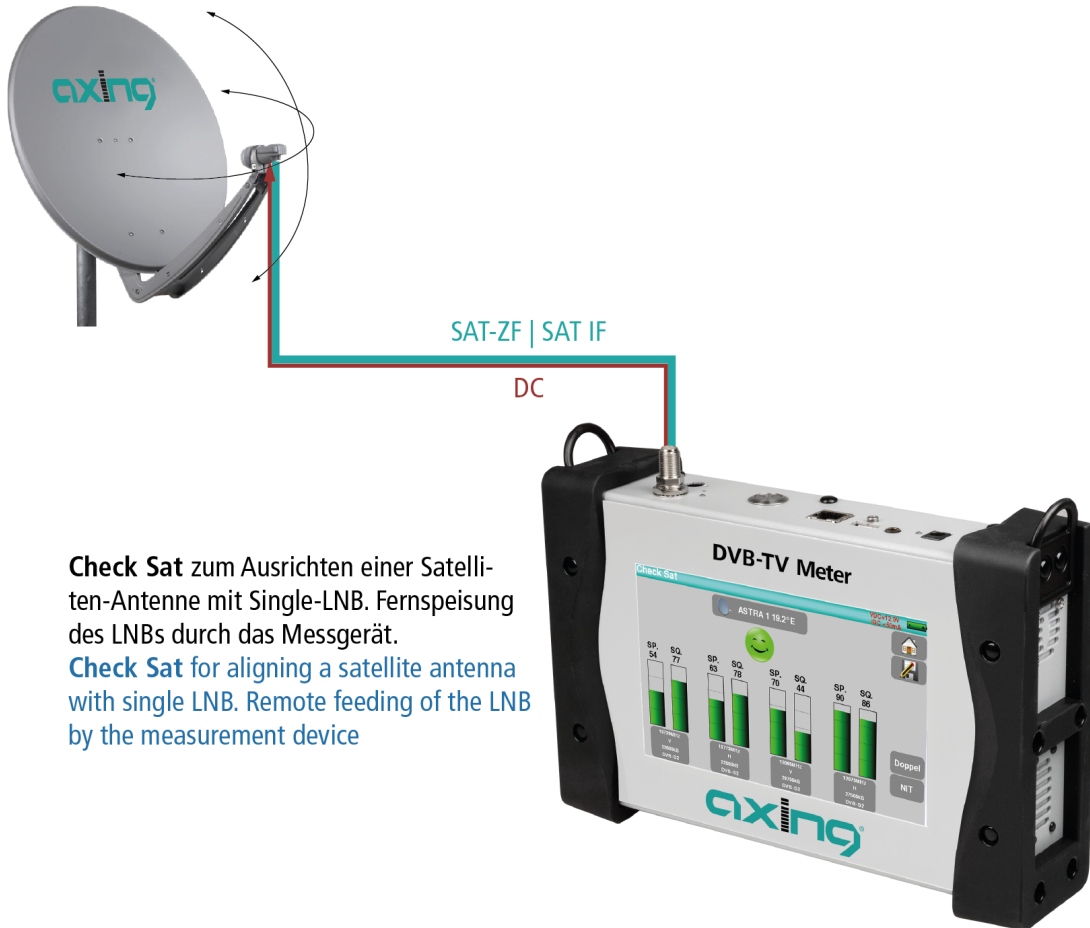

**Check Sat** zum Ausrichten einer Satelliten-Antenne mit Single-LNB. Fernspeisung des LNBs durch das Messgerät.

**Check Sat** for aligning a satellite antenna with single LNB. Remote feeding of the LNB by the measurement device

## Suitable products

[MGS 1-00 Software extension for MG 1-00](#)

[MGZ 1-00 Carrying bag for MG 1-00](#)

[MGZ 1-01 Rain and sun protection kit for MG 1-00](#)

[MGZ 2-00 Car charger for MG 1-00](#)

[MGZ 2-01 Power bank for MG 1-00](#)

[MGZ 3-00 Measuring cable and adapter set for MG 1-00](#)

[MGK 1-00 Meter calibration for DVB-TV meter MG 1-00](#)