

**MK 8-00I Hybrid headend | 8 × DVB-S/T/C in DVB-C/T/IPTV**



- ✓ 8 independent multituner inputs
- ✓ Transmodulates 8 × DVB-S/S2/S2X/T/T2/C into 8 × DVB-C/-T or 512 × SPTS or 8 × MPTS (for IPTV software extension required)
- ✓ Single cable reception I and II possible
- ✓ Output modulation configurable
- ✓ Optimized capacity management
- ✓ Remux | Crossmultiplex
- ✓ NIT editing option (software extension required)
- ✓ PID Filtering (software extension required)
- ✓ Interface for CASimulcrypt Server (software extension required)
- ✓ Web-based configuration, remote maintenance (SMARTPortal)
- ✓ Supports SNMPv1 and SNMPv2c
- ✓ Can be used for wall mounting or as a 19" unit

**Order information**

Type	MK 8-00I
Order no.	MK00800I
GTIN	7611682009958
PE	1
VE	1
EU customs tariff number	85256000




**Technical data**

<b>Inputs</b>	
Number of tuners	8 × DVB-S/S2/S2X/T/T2/C
Connector	8 × F-female
Frequency range	900 ... 2150 MHz @ DVB-S/S2/S2X 50 ... 898 MHz @ DVB-C 50 ... 898 MHz @ DVB-T/T2
Channel bandwidth	5/6/7/8 MHz @ DVB-T/T2
Input level	43 ... 84 dBµV @ DVB-S/S2/S2X 49 ... 84 dBµV @ DVB-C 39 ... 84 dBµV @ DVB-T/T2
LNB voltage	13/17 V; 22 kHz on/off; DiSEqC 1.0
Max. LNB current	250 mA per input 1000 mA per device
<b>Input modulation</b>	
Type	QPSK/8PSK/16PSK/32PSK @ DVB-S/S2/S2X QAM16, QAM32, QAM64, QAM128, QAM256 @ DVB-C QPSK, QAM16, QAM64 @ DVB-T QPSK, QAM16, QAM64, QAM256 @ DVB-T2
Compliance	DVB-S = EN 300 421 DVB-S2 = EN 302 307-1V1.4.1 DVB-S2X = EN 302 307-2V1.1.1 DVB-C = EN 300 429/ITU-TJ.83 Annex A/C DVB-T = EN 300 744 DVB-T2 = ETSI EN 302 755
Supported input transport streams	MPEG-2 ISO/IEC 13818   MPEG-4 ISO/IEC 14496
Error correction	auto
Symbol rate	1.5 ... 45 MS/s (< 40 MS/s in 32APSK) @ DVB-S/S2/S2X 1 ... 7.2 Mbaud @ DVB-C
<b>Transportstreams</b>	
Modifiable program information	Program name, SID remapping, PID remapping, PID filtering* TSID, ONID
LCN	Yes
NIT handling @ DVB-C	auto   off   manual*
Encryption	DVB-CSA*, DVB-CISSA*, ATIS-IDSA*, AES-ECB*, AES-CBC*
<b>Output</b>	
Number of channels	8 × DVB-C/DVB-T
Frequency range	109 ... 1006 MHz @ DVB-C 109 ... 862 MHz @ DVB-T
Channels selectable	S2 ... K87 @ DVB-C S2 ... K69 @ DVB-T
Channel bandwidth	7/8 MHz @ DVB-T
Possible frequency shift	-4 ... +4 MHz (0,5 MHz steps)

Connector	1 × F-female
Test port	1 × F-female (–30 dB)
Impedance	75 Ω
Output level adjustable	80 ... 100 dBμV @ DVB-C 77 ... 98 dBμV @ DVB-T
<b>Output modulation</b>	
Compliance	DVB-T (EN 300 744) DVB-C (EN 300 429/ITU-TJ.83 Annex A/C)
Type	QAM16, QAM32, QAM64, QAM128, QAM256 @ DVB-C QPSK, QAM16, QAM64 @ DVB-T
MER	≥ 40 dB @ DVB-C ≥ 36 dB @ DVB-T
Bit rate, max	50.87 Mbps @ DVB-C   31.668 Mbps @ DVB-T
FFT	2K mode @ DVB-T
FEC	1/2, 2/3, 3/4, 5/6, 7/8 @ DVB-T
Guard interval	1/4, 1/8, 1/16, 1/32 @ DVB-T
Symbol rate	1 ... 7.5 MBaud/s @ DVB-C
<b>IP output</b>	
Transportstreams	512 × SPTS   8 × MPTS
Total net data rate	900 Mbps
Data rate per tuner	125 Mbps
Supported transport protocols	UDP
Supported application protocols	RTP
<b>Interfaces</b>	
Ethernet connectors	2 × RJ 45
Ethernet standards	IEEE 802.3, 100 Base-T @ Control IEEE 802.3, 1000 Base-T /1 GbE @ IPTV OUT
Supported configuration protocols	HTTP, SNMP v1, SNMP v2c, AXING SMARTPortal**
<b>General</b>	
Operating temperature range (acc. to EN 60065)	–10 °C ... +50 °C
Operating voltage	100 ... 240 VAC/50 ... 60 Hz
Power consumption	60 W
Equipotential bonding connection	4 mm <sup>2</sup>
Dimensions (W × H × D) appr.	480 × 253 × 47 mm
Weight	3.350 kg
Comments	* with software extension only ** encrypted, cloud-based application for configuration, monitoring and remote maintenance

## Example of use

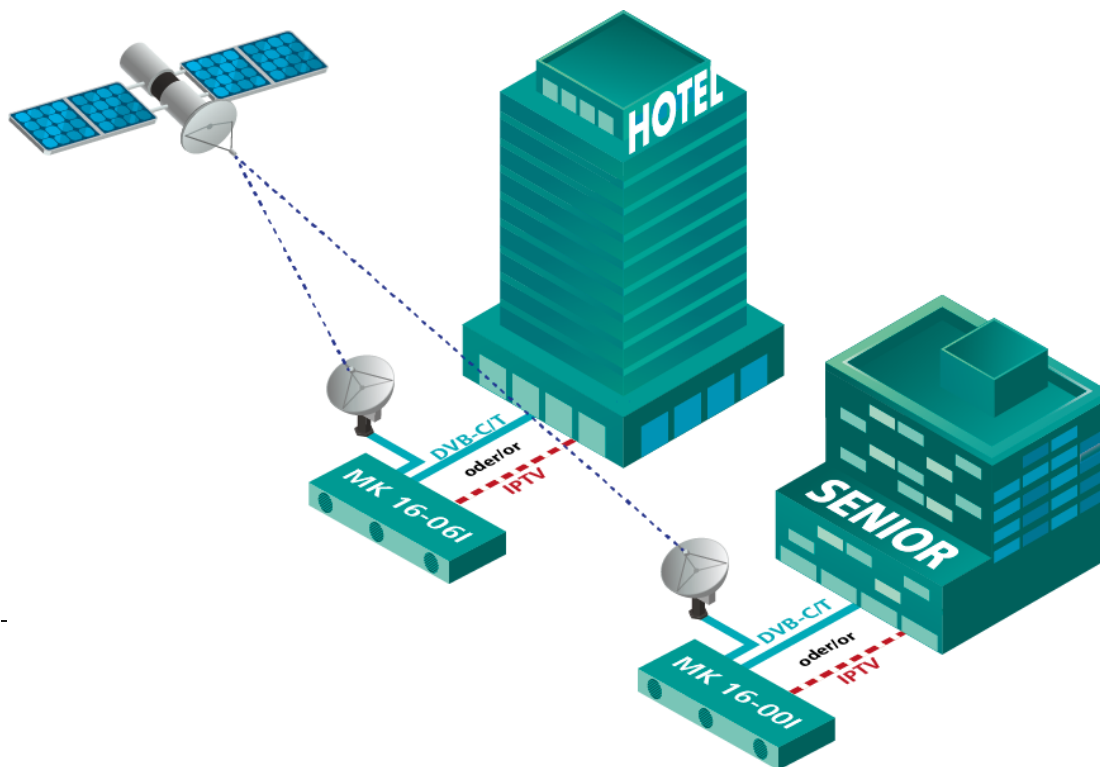

## Suitable products

- [MKS 1-00 Software extension to edit a NIT](#)
- [MKS 1-01 Software extension for PID filtering](#)
- [MKS 1-02 Software extension for CASimulcrypt](#)
- [MKS 1-03I Software extension for IPTV output](#)
- [MKS 8-16 Software extension from 8 to 16 output modulators](#)
- [MKZ 1-00 Front panel for 19" usage](#)