OVK 80-03 Pre-terminated optical cable | 80 m



- ✔ SC/APC connector at one end
- ✔ APC ferrule at the other end
- ✔ SC connector for tool-free plugging onto ferrule included – so no field splicing
- ✔ Can be pushed, pulled or blown into ducts with an internal diameter of only 5.5 mm
- ✔ Complies with IEC 60794-1-2
- ✔ Single-Mode, ITU-T: G657A1
- ✔ Fire behaviour Dca-s3,d0,a3 acc. EN 50575:2014 + A1:2016
- ✔ Delivery on a cardboard spool


Order information

Type	OVK 80-03
Order no.	OVK08003
GTIN	7611682401172
PE	1
VE	1
EU customs tariff number	

Technical data

Through loss	0.4 dB/km @ 1310 nm 0.3 dB/km @ 1550 nm
Connectors	
Connector type	SC/APC male to APC ferrule
Mechanical data	
Cable length	80 m
Bending radius Installation | Operation	11 mm | 22 mm
Tension strength	100 N
General	
Operating temperature range	–30 … 70° C
Weight	0,32 kg

Example of use

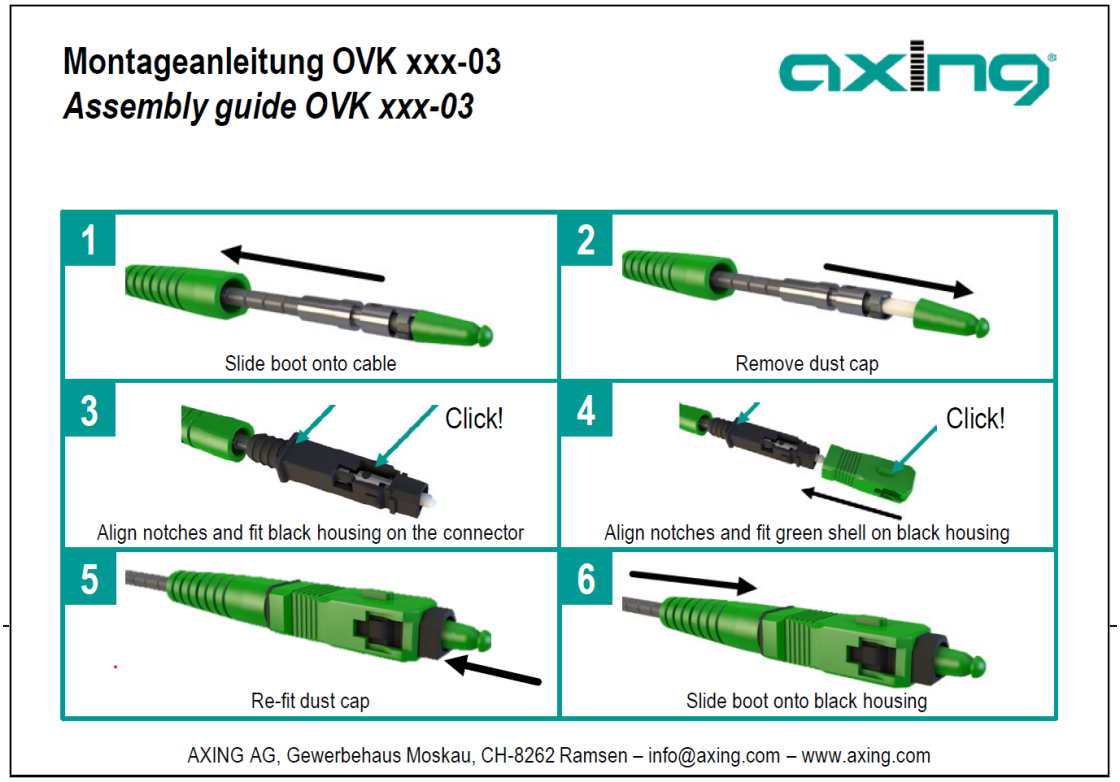

Suitable products

SKA 1-00 Cable dispenser