


## QEW 4-06 Earthing angle | single-rowed

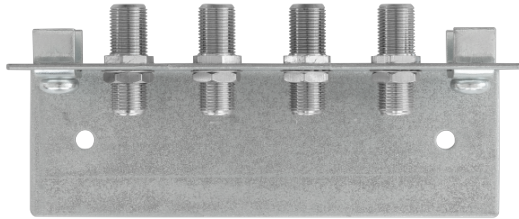

- ✓ 4-way
- ✓ Earthing and equipotential bonding acc. to EN 60728-11
- ✓ For AXING multiswitches SPU xx8-06 and SES 984-06 at subscriber outputs (patch cable SAK 21/41-02 required)
- ✓ With premium-line double F-sockets CFA 26-02

### Order information

Type	QEW 4-06
Order no.	QEW00406
GTIN	7611682006735
PE	1
VE	1
EU customs tariff number	85366910

**Wide Band**  
approved - 2.4 GHz

### Technical data

Application	SPU xx8-06 / SES 544-06 / SES 984-06
Screening factor acc. to EN 50083-2	> 90 dB
<b>Connectors</b>	
Connector type	F
Number	4
Return loss	20 dB -1.5dB/Okt.
<b>General</b>	
Material	surface treated
Dimensions (W × H × D) appr.	130 × 45 × 55 mm
Weight	0.156 kg

### Suitable products

[SAK 21-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m](#)

[SAK 41-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m](#)