


**QEW 4-06 Earthing angle | single-rowed**

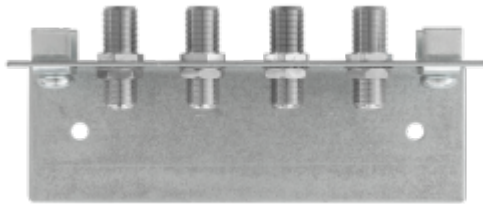

- ✓ 4-way
- ✓ Earthing and equipotential bonding acc. to EN 60728-11
- ✓ For AXING multiswitches SPU xx8-06 and SES 984-06 at subscriber outputs (patch cable SAK 21/41-02 required)
- ✓ With premium-line double F-sockets CFA 26-02

**Order information**

|                          |               |
|--------------------------|---------------|
| Type                     | QEW 4-06      |
| Order no.                | QEW00406      |
| GTIN                     | 7611682006735 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85366910      |



**Technical data**

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| Application                         | SPU xx8-06 / SES 544-06 / SES 984-06 |
| Screening factor acc. to EN 50083-2 | > 90 dB                              |
| <b>Connectors</b>                   |                                      |
| Connector type                      | F                                    |
| Number                              | 4                                    |
| Return loss                         | 20 dB -1.5dB/Okt.                    |
| <b>General</b>                      |                                      |
| Material                            | surface treated                      |
| Dimensions (W x H x D) appr.        | 130 x 45 x 55 mm                     |
| Weight                              | 0.156 kg                             |

**Suitable products**

- [SAK 21-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m](#)  
[SAK 41-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m](#)