

SK 32-10 Satellite gateway



- ✓ Converts up to 32 independent satellite transponders to different output frequencies (to generate a new SAT IF band)
- ✓ 2 x 4 inputs for two satellite positions
- ✓ Web-based configuration
- ✓ Compatible with AXING SMARTPortal
- ✓ Suitable for wall mounting or use as a 19" unit

Order information


Type	SK 32-10
Order no.	SK03210
GTIN	7611682401912
PE	1
VE	1
EU customs tariff number	85176990



Technical data

Inputs	
Number	2 x 4
Frequency range	950 ... 2150 MHz @ Quattro 300 ... 2350 MHz @ Wideband
LNB voltage	15 ... 18 V
Max. LNB current	500 mA
Level	60... 90 dBμV
Output	
Frequency range	900 ... 2150 MHz
Channel bandwidth	24 ... 37 MHz
Output level	78 dBμV
Connector	F-female
General	
Operating temperature range (acc. to EN 60065)	-10 °C ... +50 °C
Power consumption	12 W
Equipotential bonding connection	4 mm²
Dimensions (W x H x D) appr.	480 x 43 x 275 mm
Weight	2.650 kg

Example of use

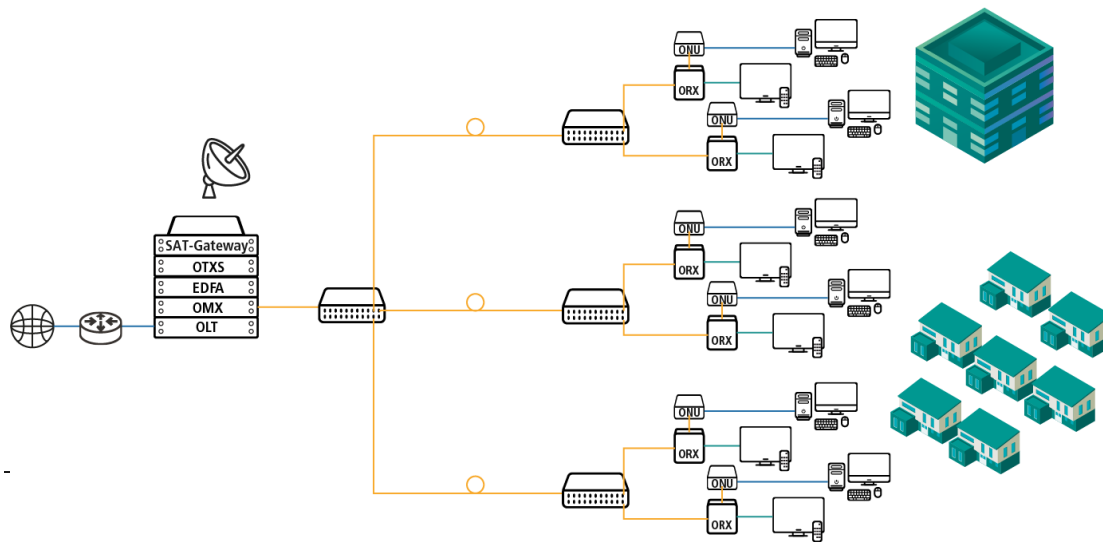

Suitable products

SAA 85-02N Aluminium satellite antenna 85 cm | Anthracite

SCO 4-10 Quattro LNB | DVB-S/S2/S2X

QEW 4-20 Earthing angle | single-rowed | surge protection