SK 32-10 Satellite gateway



- ✔ Converts up to 32 independent satellite transponders to different output frequencies (to generate a new SAT IF band)
- ✔ 2 x 4 inputs for two satellite positions
- ✔ Web-based configuration
- ✔ Compatible with AXING SMARTPortal
- ✔ Suitable for wall mounting or use as a 19" unit


Order information

Type	SK 32-10
Order no.	SK03210
GTIN	7611682401912
PE	1
VE	1
EU customs tariff number	85176990

Technical data

Inputs	
Number	2 × 4
Frequency range	950 … 2150 MHz @ Quattro 300 … 2350 MHz @ Wideband
LNB voltage	15 … 18 V
Max. LNB current	500 mA
Level	60… 90 dBµV
Output	
Frequency range	900 … 2150 MHz
Channel bandwidth	24 … 37 MHz
Output level	78 dBµV
Connector	F-female
General	
Operating temperature range (acc. to EN 60065)	–10 °C … +50 °C
Power consumption	12 W
Equipotential bonding connection	4 mm²
Dimensions (W × H × D) appr.	480 × 43 × 275 mm
Weight	2.650 kg

Example of use

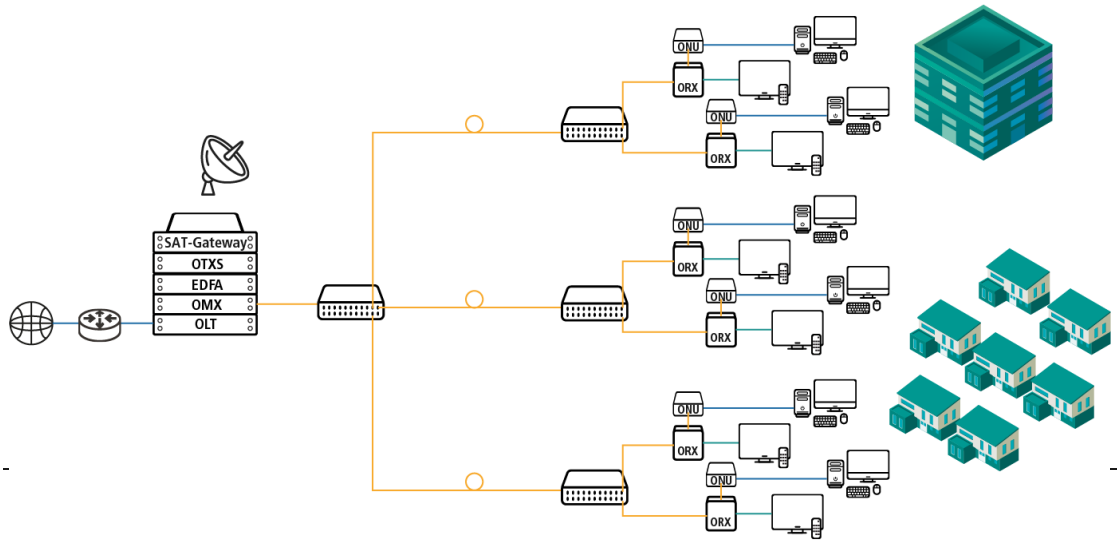

Suitable products

SAA 85-02N Aluminium satellite antenna 85 cm | Anthracite
SCO 4-10 Quattro LNB | DVB-S/S2/S2X
OEW 4-20 Earthing angle | single-rowed | surge protection