

SPU 54-05 Multiswitch | 5 in 4 | basic-line



- ✓ For up to 4 subscribers
- ✓ Active satellite path, passive terrestrial path
- ✓ Suitable for return path
- ✓ Switching power supply

Order information

Type	SPU 54-05
Order no.	SPU05405
GTIN	7611682130553
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs

Number	5
Frequency range	5...65 MHz 85...862 MHz 950...2200 MHz
Isolation V H.	25 dB
Isolation SAT inputs SAT inputs	30 dB
Isolation TERR SAT	50 dB

Subscriber ports

Number	4
Tap loss TERR	20 dB
Tap loss SAT	8...2 dB
Isolation	35 dB
Max. output level SAT (3rd order SAT EN 50083:3 35dB KMA, 2 sender test method)	90 dBμV


Connectors

Connector type	F
----------------	---

General

Switching power supply	90...250 V~ 47-63 Hz 18 V=0.5 A
Power consumption	3.7 W
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	275 × 125 × 50 mm
Weight	0.624 kg
IP code	IP20

Example of use

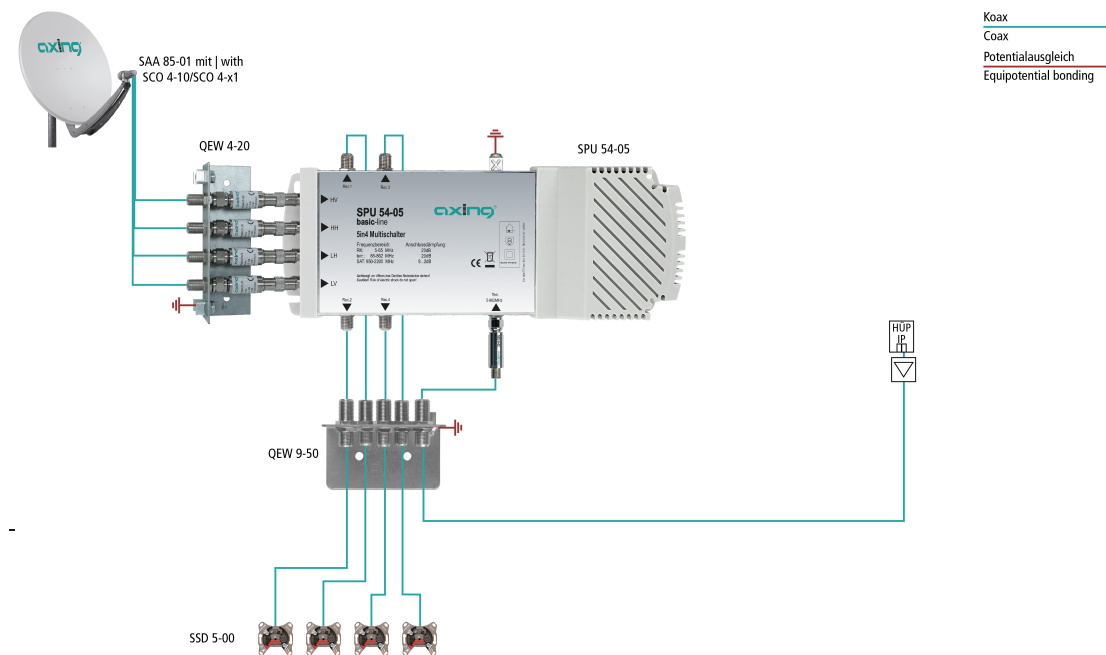

Suitable products

QEW 4-20 Earthing angle | single-rowed | surge protection