

## SPU 54-09 Active multiswitch | 5 in 4 | premium-line



- ✓ For up to 4 subscribers
- ✓ Active satellite, passive terrestrial path
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Suitable for Quad LNB
- ✓ Switching power supply unit (detachable up to 10 m)

### Order information

Type	SPU 54-09
Order no.	SPU05409
GTIN	7611682000467
PE	1
VE	1
EU customs tariff number	85291095



### Technical data

#### Inputs

Number	5
Frequency range	5 ... 862 MHz   950 ... 2200 MHz

#### Subscriber ports

Number	4
Switch commands	13/18 V, 0/22 kHz
Gain SAT	-3...3 dB
Gain TERR passive	-20 dB
Isolation	>26 dB
Switching isolation	>26 dB
Max. output level SAT (3rd order SAT EN 50083 3 35dB KMA, 2 sender test method)	94 dB $\mu$ V
Current consumption per port (without LNB supply)	25 mA


#### Connectors

Connector type	F
----------------	---

#### General

Operating temperature range (acc. to EN 60065)	-20...+50°C
Switching power supply	90...250 V~   47-63 Hz   18 V= / 0.7A
Power indicator	LED
Power consumption without LNB supply (TERR passive   active)	3.4 W   -
Power consumption in Stand-by (TERR passive   active)	0.9 W   -
Equipotential bonding connection	4 mm <sup>2</sup>
Dimensions (W x H x D) appr.	195 x 145 x 85 mm
Weight	0.705 kg
IP code	IP20

## Example of use

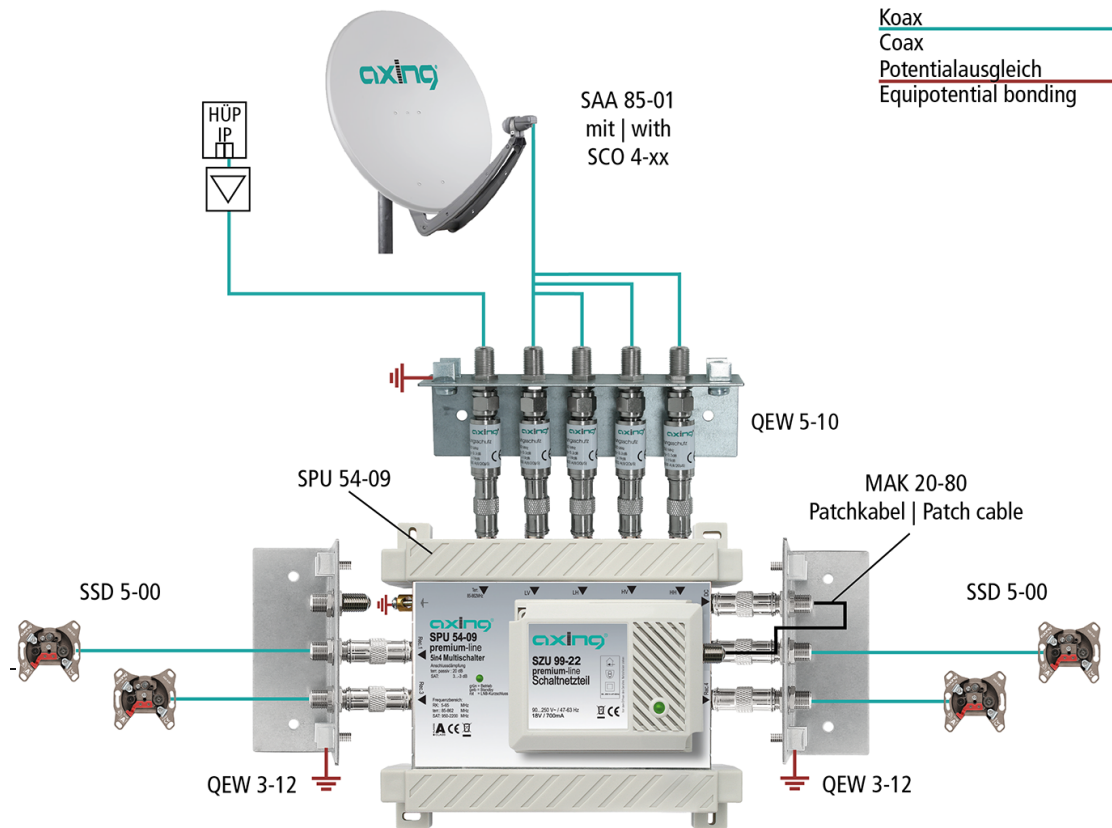

## Suitable products

QEW 5-10 Earthing angle | single-rowed | surge protection

QEW 3-12 Earthing angle | single-rowed | quickfix

MAK 20-80 F | patch cable | axial connectors male | double shielded | 0.20 m