

SPU 56-05 Multiswitch | 5 in 6 | basic-line



- ✓ Up to 6 subscribers
- ✓ Active satellite path, passive terrestrial path
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Suitable for Quad LNB
- ✓ Switching power supply

Order information


Type	SPU 56-05
Order no.	SPU05605
GTIN	7611682130577
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs	
Number	5
Frequency range	5 ... 862 MHz 950 ... 2200 MHz
Isolation V H	25 dB
Isolation SAT inputs SAT inputs	30 dB
Isolation TERR SAT	50 dB
Subscriber ports	
Number	6
Tap loss TERR	20 dB
Isolation	35 dB
Max. output level SAT (3rd order SAT EN 50083-3 35dB KMA, 2 sender test method)	90 dB μ V
Connectors	
Connector type	F
General	
Operating temperature range (acc. to EN 60065)	-20...+50°C
Switching power supply	90...250 V~ 47-63 Hz 18 V=0.5 A
Power consumption	4.4 W
Equipotential bonding connection	4 mm ²
Dimensions (W × H × D) appr.	275 × 125 × 50 mm
Weight	0.638 kg
IP code	IP20

Example of use

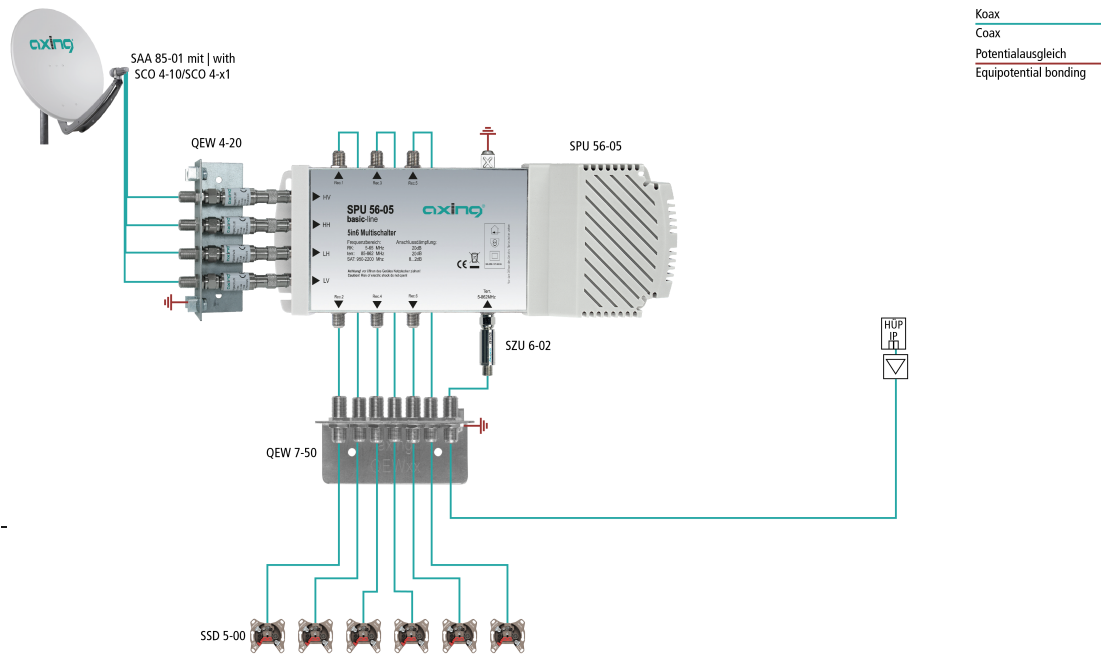

Suitable products

QEW 4-20 Earthing angle | single-rowed | surge protection