

SPU 56-05 Multiswitch | 5 in 6 | basic-line



- ✓ Up to 6 subscribers
- ✓ Active satellite path, passive terrestrial path
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Suitable for Quad LNB
- ✓ Switching power supply

Order information

Type	SPU 56-05
Order no.	SPU05605
GTIN	7611682130577
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs

Number	5
Frequency range	5 ... 862 MHz 950 ... 2200 MHz
Isolation V H	25 dB
Isolation SAT inputs SAT inputs	30 dB
Isolation TERR SAT	50 dB

Subscriber ports

Number	6
Tap loss TERR	20 dB
Tap loss SAT	8...2 dB
Isolation	35 dB
Max. output level SAT (3rd order SAT EN 500833 35dB KMA, 2 sender test method)	90 dB μ V


Connectors

Connector type	F
----------------	---

General

Switching power supply	90...250 V~ 47-63 Hz 18 V=0.5 A
Power consumption	4.4 W
Equipotential bonding connection	4 mm ²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W x H x D) appr.	275 x 125 x 50 mm
Weight	0.638 kg
IP code	IP20

Example of use

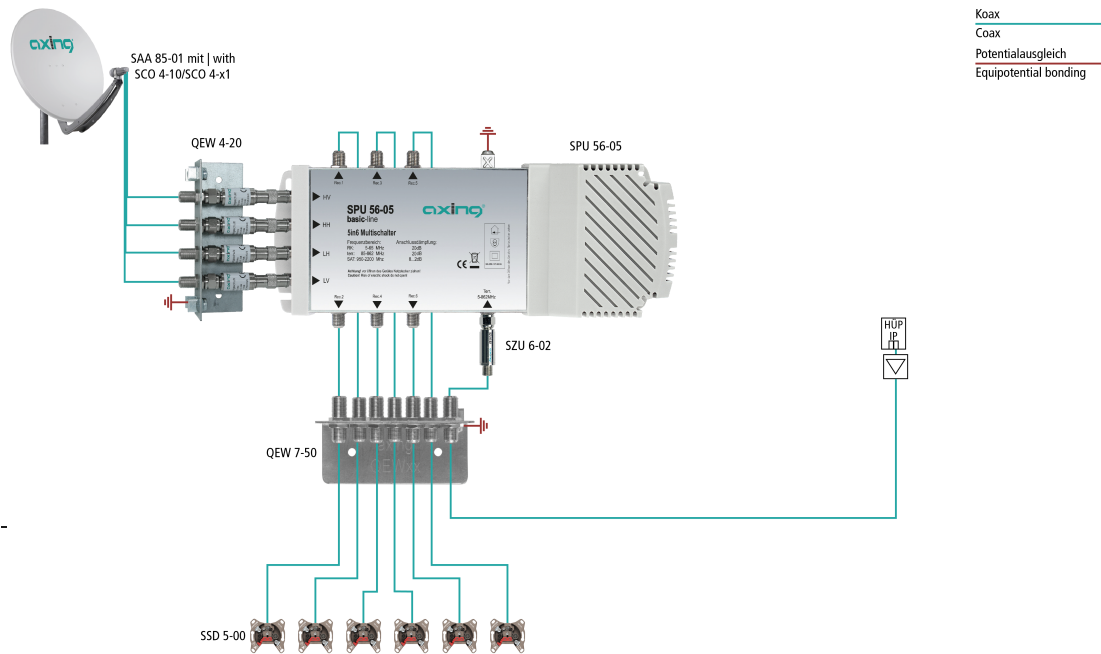

Suitable products

QEW 4-20 Earthing angle | single-rowed | surge protection