SPU 56-05 Multiswitch | 5 in 6 | basic-line



- ✔ Up to 6 subscribers
- ✔ Active satellite path, passive terrestrial path
- ✔ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✔ Suitable for Quad LNB
- ✔ Switching power supply


Order information

Type	SPU 56-05
Order no.	SPU05605
GTIN	7611682130577
PE	1
VE	1
EU customs tariff number	85291095

Technical data

Inputs	
Number	5
Frequency range	5 … 862 MHz | 950 … 2200 MHz
Isolation V | H	25 dB
Isolation SAT inputs | SAT inputs	30 dB
Isolation TERR | SAT	50 dB
Subscriber ports	
Number	6
Tap loss TERR	20 dB
Isolation	35 dB
Max. output level SAT (3rd order SAT EN 50083⍰3 35dB KMA, 2 sender test method)	90 dBµV
Connectors	
Connector type	F
General	
Operating temperature range (acc. to EN 60065)	-20…+50°C
Switching power supply	90…250 V~ | 47-63 Hz | 18 V=0.5 A
Power consumption	4.4 W
Equipotential bonding connection	4 mm²
Dimensions (W × H × D) appr.	275 × 125 × 50 mm
Weight	0.638 kg
IP code	IP20

Example of use

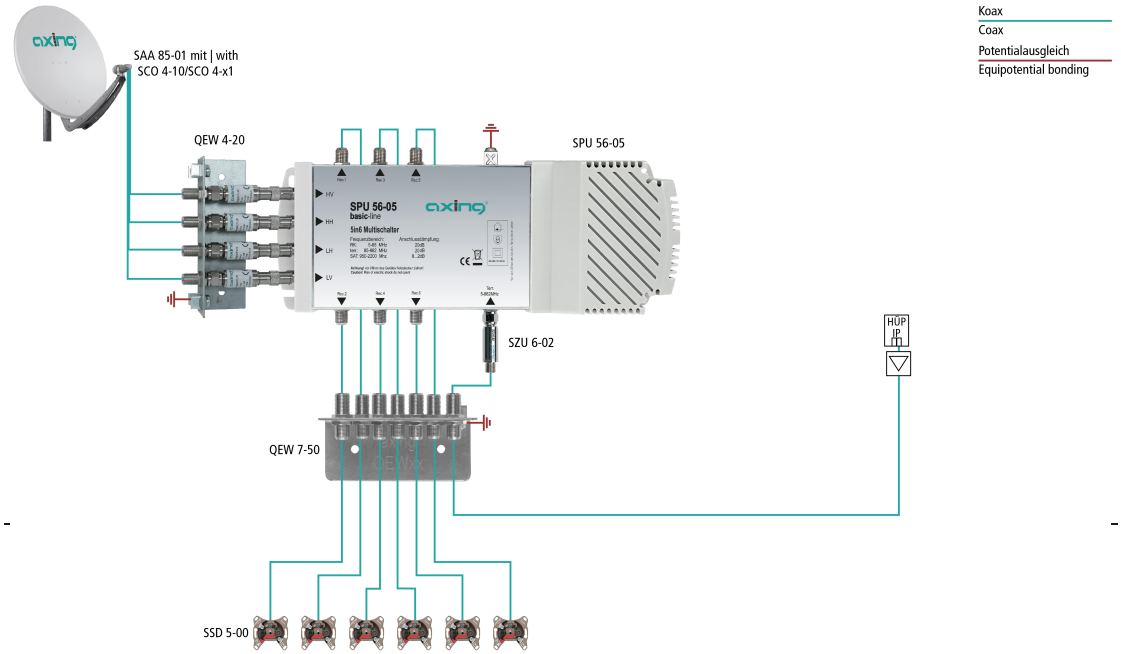

Suitable products

QEW 4-20 Earthing angle | single-rowed | surge protection