

SPU 98-06 Multiswitch stand-alone/cascade unit | 9 in 8 | basic-line



- ✓ For up to 8 subscribers
- ✓ Subscriber ports SAT active, terrestrial passive
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Powered by ext. power supply SZU 99-06 (not included in delivery) or via the SAT-IF trunk lines
- ✓ Cascadable - Cascade outputs must be terminated with DC-isolated 75 Ohm terminating resistors (e.g. CFA 11-00, not included in delivery)

Order information


Type	SPU 98-06
Order no.	SPU09806
GTIN	7611682005387
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs	
Number	9
Frequency range	5...862 MHz 950...2400 MHz
Max. LNB current	1500 mA
Subscriber ports	
Number	8
Switch commands	13/18 V, 0/22 kHz, DiSEqC 1.0
Tap loss TERR	24 dB ±2 dB
Tap loss SAT	2...0 dB ±2 dB
Max. output level SAT (3rd order SAT EN 50083 3 35dB KMA, 2 sender test method)	102 dBµV
Current consumption per port (without LNB supply)	< 35 mA
Trunk outputs	
Number	9
Through loss TERR	2...3dB ±1.5 dB
Through loss SAT	1...2 dB ±1.5dB
Connectors	
Connector type	F
General	
Current consumption	10 mA
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	202 x 128 x 63 mm
Weight	0.685 kg
IP code	IP20

Example of use

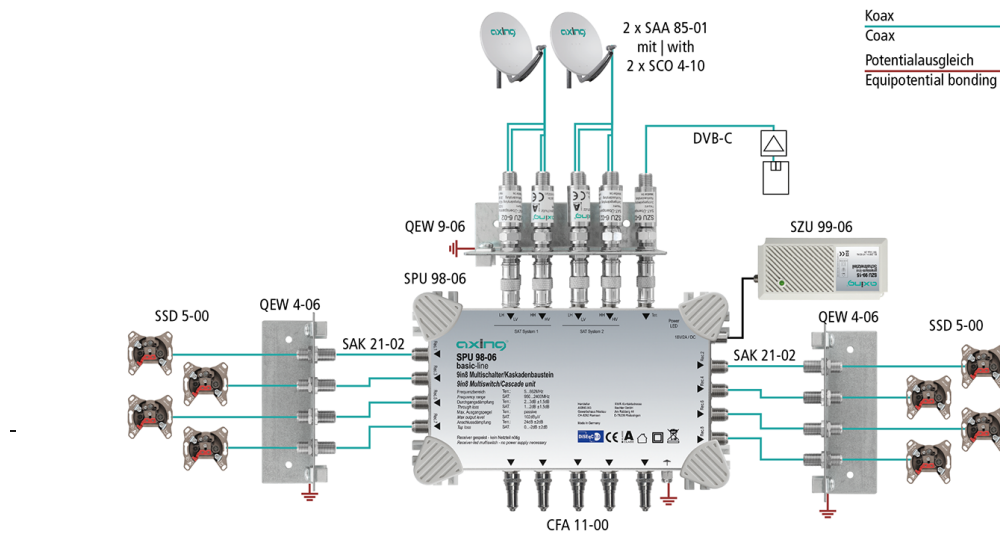

Suitable products

[QEW 9-06](#) Earthing angle | two-rowed | surge protection

[QEW 4-06](#) Earthing angle | single-rowed

[SAK 21-02 F](#) | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m

[SAK 41-02 F](#) | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m

[CFA 11-00](#) Terminating resistor | 75 Ohm | DC isolated

[CFA 4-01](#) Adapter F/F | Quickfix