


SPU 1710-09 Cascade unit | 17 in 10 | premium-line

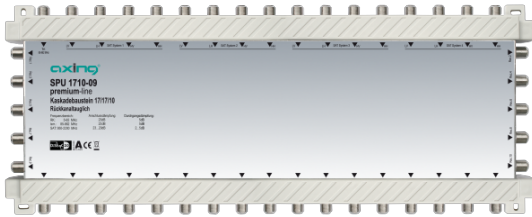

- ✓ For up to 10 subscribers
- ✓ Passive satellite and terrestrial path
- ✓ For cascadable 17 in x SAT systems
- ✓ Optimized for the use with SPU 1716-09
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)

Order information


Type	SPU 1710-09
Order no.	SPU171009
GTIN	7611682001747
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs	
Number	17
Frequency range	5 ... 862 MHz 950 ... 2200 MHz
Subscriber ports	
Number	10
Switch commands	13/18 V, 0/22 kHz, DiSEqC 2.0
Tap loss TERR	23 dB
Tap loss SAT	23...20 dB
Isolation	>26 dB
Switching isolation	>26 dB
Trunk outputs	
Number	17
Through loss TERR	5 dB
Through loss SAT	2...5 dB
Isolation	>26 dB
Rejection (SAT TERR)	>40 dB
Connectors	
Connector type	F
General	
Equipotential bonding connection	4 mm ²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	407 × 170 × 40 mm
Weight	1.420 kg
IP code	IP20

Example of use

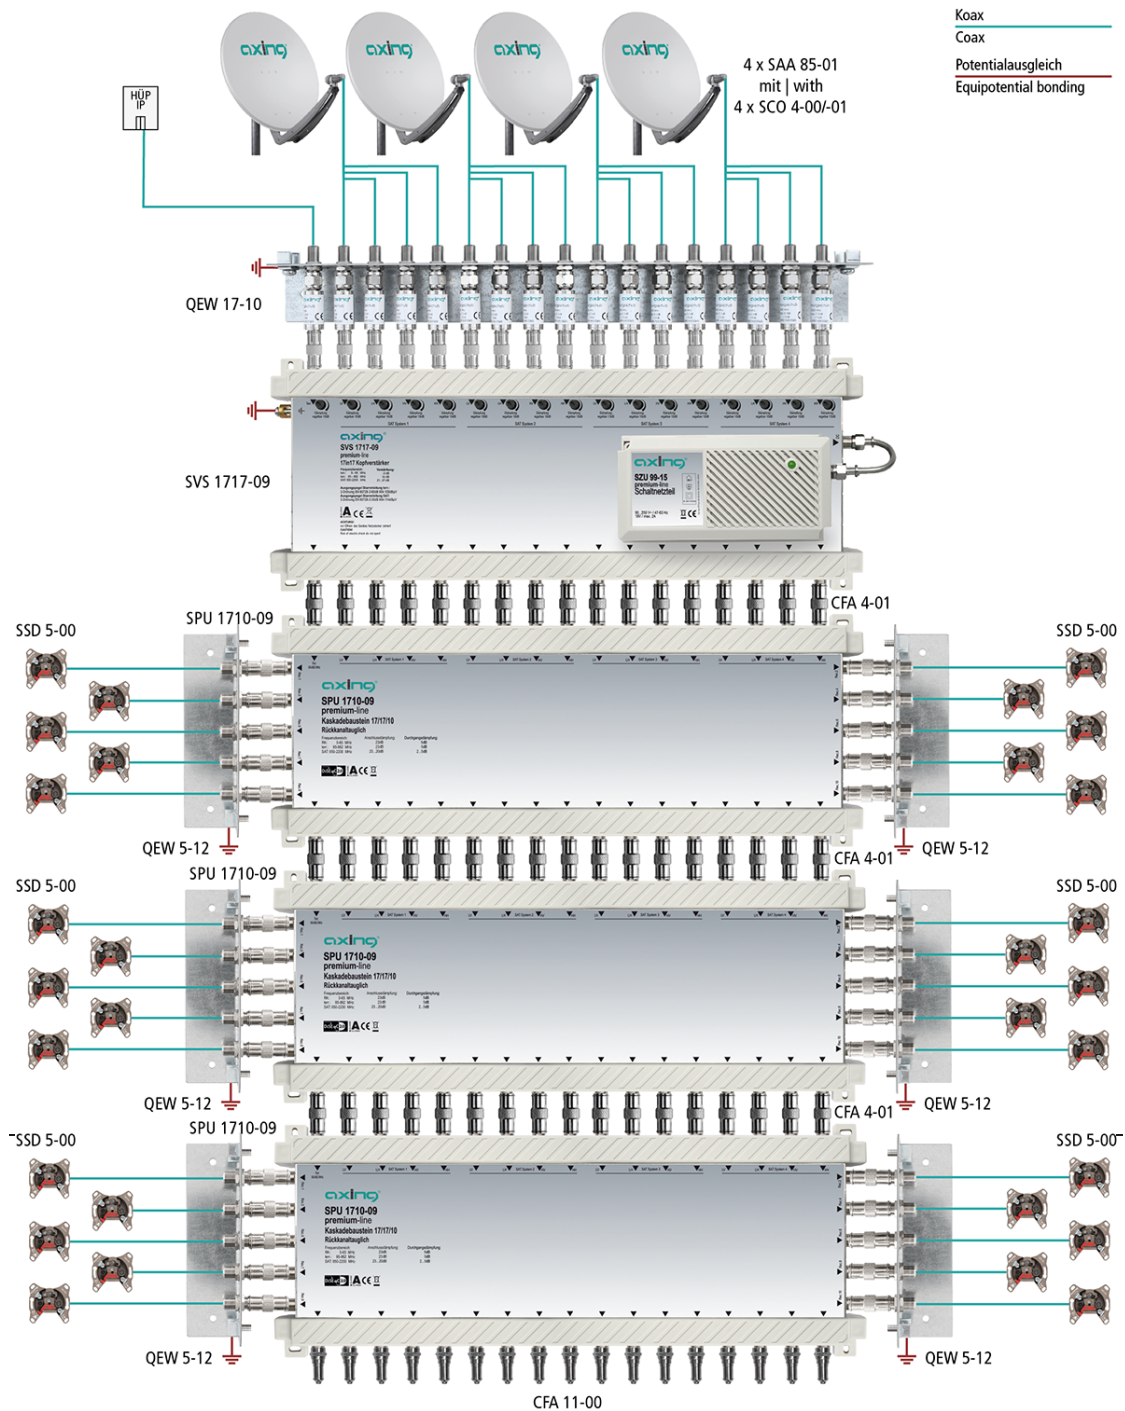

Suitable products

[QEW 17-10 Earthing angle | single-rowed | surge protection](#)

[CFA 11-00 Terminating resistor | 75 Ohm | DC isolated](#)

[CFA 4-01 Adapter F/F | Quickfix](#)