

## SPU 512-05 Multiswitch | 5 in 12 | basic-line



- ✓ For up to 12 subscribers
- ✓ Active satellite path, passive terrestrial path
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Suitable for Quad LNB
- ✓ Switching power supply

## Order information


|                          |               |
|--------------------------|---------------|
| Type                     | SPU 512-05    |
| Order no.                | SPU51205      |
| GTIN                     | 7611682135138 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291095      |



## Technical data

|                                                                                |                                       |
|--------------------------------------------------------------------------------|---------------------------------------|
| Inputs                                                                         |                                       |
| Number                                                                         | 5                                     |
| Frequency range                                                                | 5 ... 862 MHz   950 ... 2200 MHz      |
| Isolation V   H                                                                | 25 dB                                 |
| Isolation SAT inputs   SAT inputs                                              | 30 dB                                 |
| Isolation TERR   SAT                                                           | 50 dB                                 |
| Subscriber ports                                                               |                                       |
| Number                                                                         | 12                                    |
| Tap loss TERR                                                                  | 20 dB                                 |
| Isolation                                                                      | 35 dB                                 |
| Max. output level SAT (3rd order SAT EN 500833 35dB KMA, 2 sender test method) | 90 dBμV                               |
| Connectors                                                                     |                                       |
| Connector type                                                                 | F                                     |
| General                                                                        |                                       |
| Operating temperature range (acc. to EN 60065)                                 | -20 ... +50°C                         |
| Switching power supply                                                         | 90 ... 250 V~   47-63 Hz   18 V=0.5 A |
| Power consumption                                                              | 5.0 W                                 |
| Equipotential bonding connection                                               | 4 mm²                                 |
| Dimensions (W × H × D) appr.                                                   | 355 × 125 × 50 mm                     |
| Weight                                                                         | 0.790 kg                              |
| IP code                                                                        | IP20                                  |

## Example of use

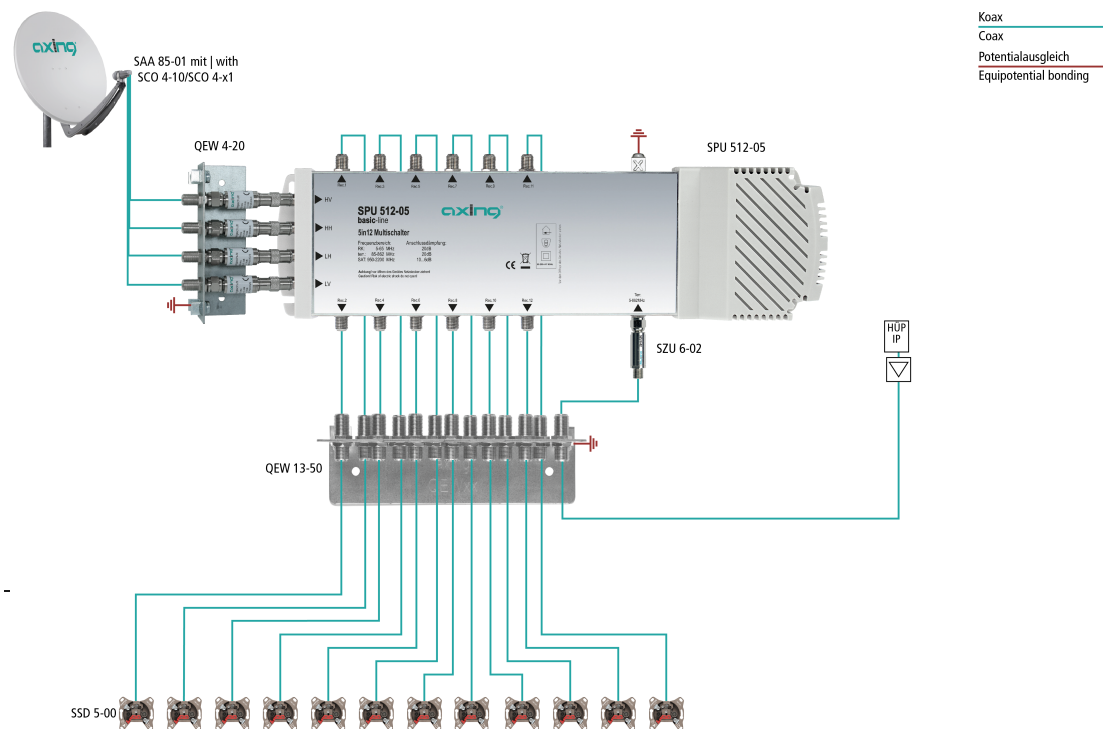

## Suitable products

QEW 4-20 Earthing angle | single-rowed | surge protection