

SPU 512-06 Multiswitch stand-alone/cascade unit | 5 in 12 | basic-line



- ✓ For up to 12 subscribers
- ✓ Subscriber ports SAT active, terrestrial passive
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Receiver-fed multiswitch – no power supply necessary
- ✓ Cascadable - Cascade outputs must be terminated with DC-isolated 75 Ohm terminating resistors (e.g. CFA 11-00, not included in the scope of delivery)

Order information


Type	SPU 512-06
Order no.	SPU51206
GTIN	7611682005349
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs	
Number	5
Frequency range	5...862 MHz 950...2400 MHz
Max. LNB current	1500 mA
Isolation V H	>30 dB
Isolation TERR SAT	30 dB
Subscriber ports	
Number	12
Switch commands	13/18 V, 0/22 kHz
Tap loss TERR	27 dB ±3 dB
Max. output level SAT (3rd order SAT EN 50083-3 35dB KMA, 2 sender test method)	102 dBµV
Current consumption per port (without LNB supply)	< 35 mA
Trunk outputs	
Number	5
Through loss TERR	2...3 dB ±1 dB
Through loss SAT	2...4 dB ±1 dB
Connectors	
Connector type	F
General	
Operating temperature range (acc. to EN 60065)	-20...+50°C
Equipotential bonding connection	4 mm²
Dimensions (W × H × D) appr.	137 x 150 x 63 mm
Weight	0.500 kg
IP code	IP20

Example of use

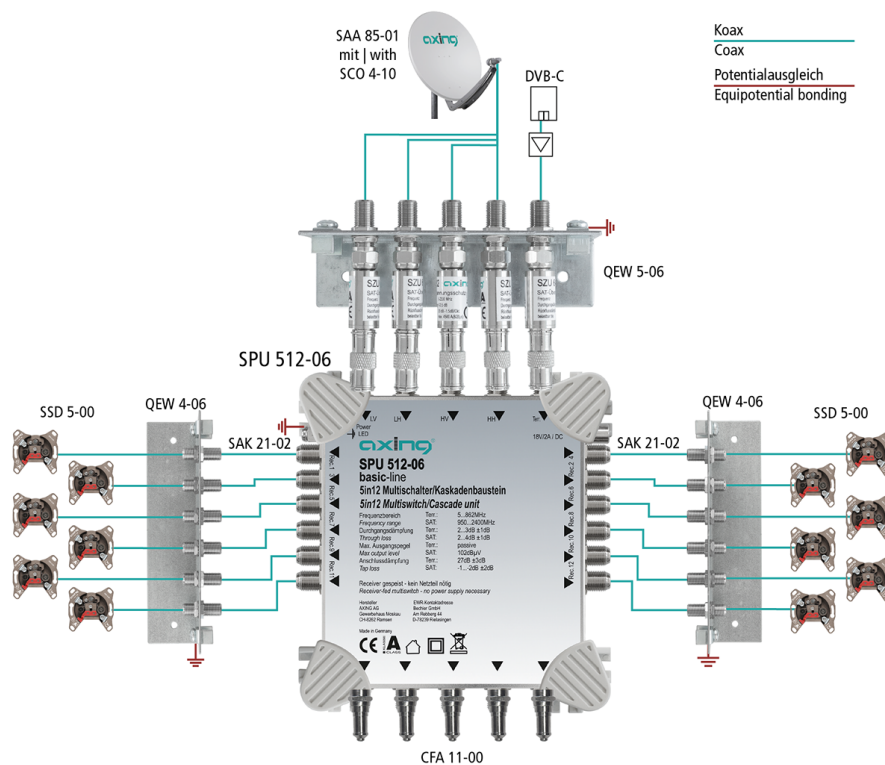

Suitable products

SZU 99-06 Switching mode power supply 18 VDC/2 A

QEW 5-06 Earthing angle | single-rowed | surge protection

QEW 6-06 Earthing angle | single-rowed

SAK 21-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m

SAK 41-02 F | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m

CFA 11-00 Terminating resistor	75 Ohm	DC isolated
--------------------------------	--------	-------------

CFA 4-01 Adapter F | F | Quickfix