


SPU 532-09N Multiswitch stand-alone/cascade unit | 5 in 32 | premium-line

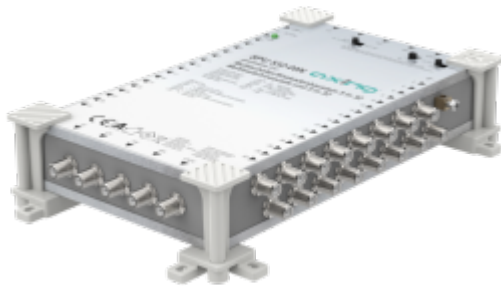

- ✓ For up to 32 subscribers
- ✓ SAT active and Quad LNB compatible
- ✓ CATV path active switchable and adjustable
- ✓ Suitable for broadband return channel with passive CATV path (suitable for EoC up to 204 MHz)
- ✓ With passive CATV path and Quattro LNB receiver-powered - no power supply unit required
- ✓ With active CATV path or Quad LNB, power supply via external power supply unit SZU 99-09N (not included) or via the SAT IF trunk lines
- ✓ USB-C port for external power supply unit
- ✓ Contemporary standby and energy saving functionalities
- ✓ Cascadable (unused cascade outputs must be terminated with DC-decoupled 75 Ohm terminating resistors (e.g. CFA 11-00, not included in the scope of delivery))

Order information


Type	SPU 532-09N
Order no.	SPU53209N
GTIN	7611682400304
PE	1
VE	1
EU customs tariff number	



Technical data

Inputs	
Number	5
Frequency range	5 ... 862 MHz 950 ... 2200 MHz
Max. LNB current	2000 mA
Attenuator CATV adjustment range, switchable to passive	0 ... 20 dB
Isolation V H	> 30 dB
Isolation CATV SAT	> 30 dB
Subscriber ports	
Number	32
Switch commands	13V, 18V, 13V/22kHz, 18V/22kHz
Tap loss CATV active	2 dB
Tap loss CATV passive	33 dB
Max. output level SAT (3rd order SAT EN 50083:3 35dB KMA, 2 sender test method)	100 dBμV
Max. output level CATV (3rd order, EN 50083:3, 60 dB KMA)	85 dBμV
Current consumption per port (without LNB supply)	50 mA
Trunk outputs	
Number	5
Max. output level CATV (3rd order EN 50083:3, 60 dB KMA)	103 dBμV
Through loss CATV active	-23 dB
Through loss CATV passive	7 dB
Through loss SAT	7 dB
Connectors	
Connector type	F-female
General	
Operating temperature range (acc. to EN 60065)	-20 ... +55° C
Equipotential bonding connection	4 mm²
Dimensions (W × H × D) appr.	180 x 280 x 55 mm
Weight	0.925 kg
IP code	IP20
Comments	*USB-C power supply units must fulfil the Power Delivery (PD) standard and have an output voltage of 20 VDC

Example of use

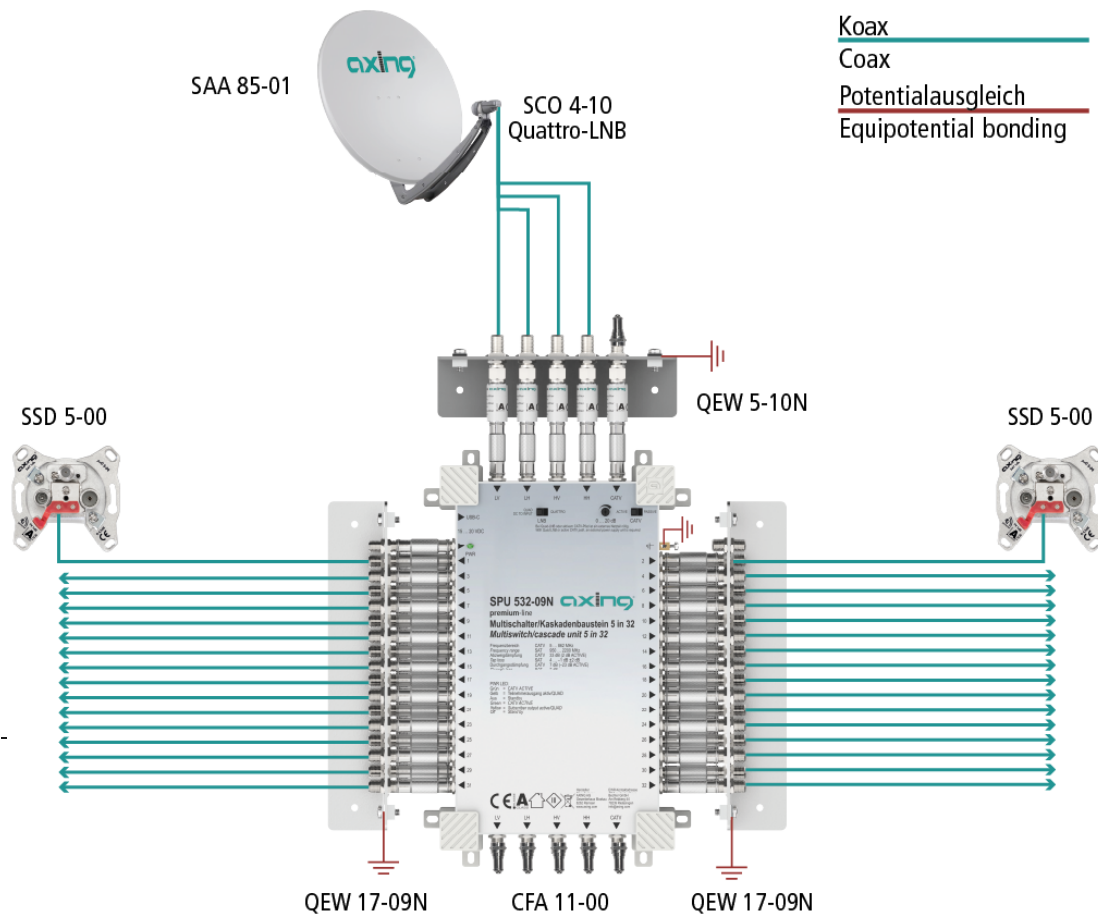

Suitable products

[QEW 5-10N Earthing angle | surge protection | 5-way](#)

[QEW 17-09N Earthing angle | 17-way](#)

[CFA 11-00 Terminating resistor | 75 Ohm | DC isolated](#)

[CFA 4-01N Adapter F | F | Quickfix | 36 mm](#)

[SZU 99-09N Switching mode power supply 18 V=700 mA](#)