


SPU 5518-19 Cascade unit | 5 in 18 | premium-line

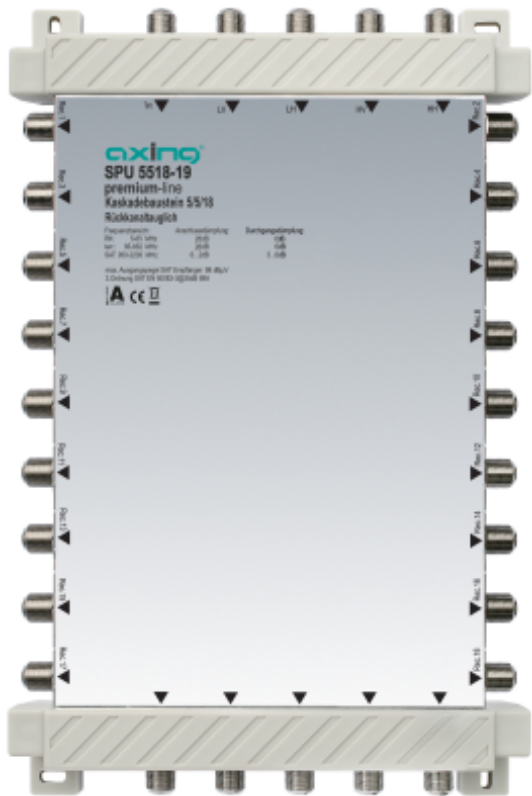

- ✓ For up to 18 subscribers
- ✓ Active satellite and passive terrestrial path
- ✓ For cascadable 5 in x SAT systems
- ✓ Optimized for the use with SPU 5xx-09
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)

Order information


Type	SPU 5518-19
Order no.	SPU551819
GTIN	7611682004526
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs	
Number	5
Frequency range	5 ... 862 MHz 950 ... 2200 MHz
Subscriber ports	
Number	18
Tap loss TERR	23...29 dB
Tap loss SAT	20...17 dB
Tap loss SAT active	6...2 dB
Isolation	>26 dB
Switching isolation	>26 dB
Max. output level SAT (3rd order SAT EN 50083-3 35dB KMA, 2 sender test method)	98 dBμV
Current consumption per port (without LNB supply)	40 mA
Trunk outputs	
Number	5
Through loss TERR	6 dB
Through loss SAT	3...6 dB
Isolation	>30 dB
Rejection (SAT TERR)	>40 dB
Connectors	
Connector type	F
General	
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	170 × 255 × 40 mm
Weight	0.850 kg

Example of use

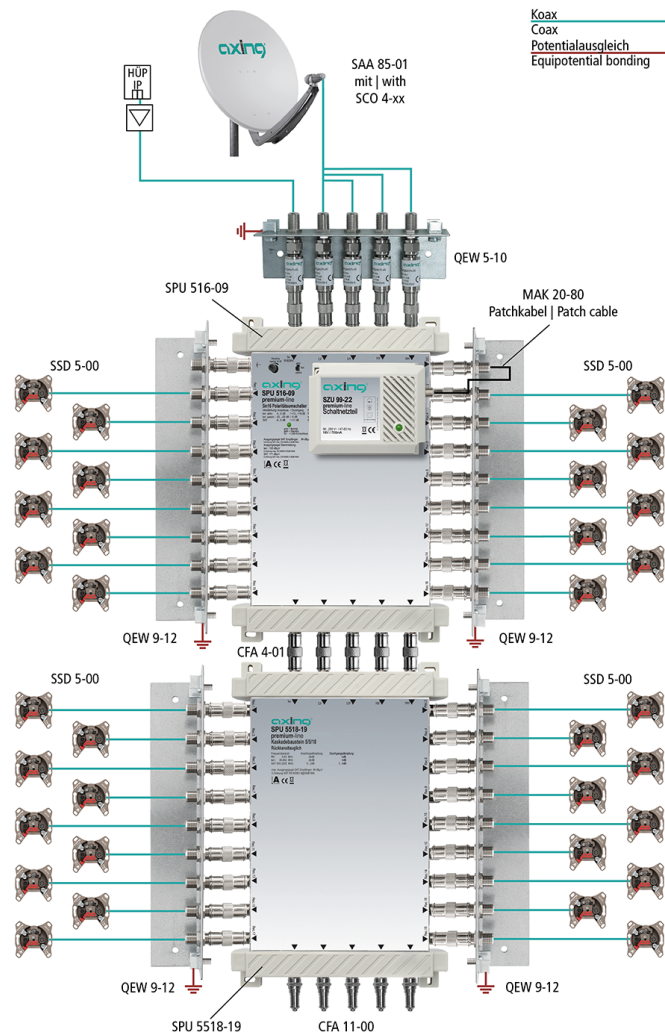

Suitable products

QEW 9-12 Earthing angle | single-rowed | quickfix

CFA 11-00 Terminating resistor | 75 Ohm | DC isolated

CFA 4-01 Adapter F | F | Quickfix