

SPU 556-09 Cascade unit | 5 in 6 | premium-line



- ✓ For up to 6 subscribers
- ✓ Passive satellite and terrestrial path
- ✓ For cascadable 5 in x SAT systems
- ✓ Optimized for the use with SPU 5xx-09
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)

Order information


Type	SPU 556-09
Order no.	SPU55609
GTIN	7611682000535
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Inputs	
Number	5
Frequency range	5 ... 862 MHz 950 ... 2200 MHz
Subscriber ports	
Number	6
Tap loss TERR	20 dB
Tap loss SAT	19...16 dB
Isolation	>26 dB
Switching isolation	>26 dB
Trunk outputs	
Number	5
Through loss TERR	4 dB
Through loss SAT	2 dB
Isolation	>30 dB
Rejection (SAT TERR)	>40 dB
Connectors	
Connector type	F
General	
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	170 × 130 × 40 mm
Weight	0.448 kg

Example of use

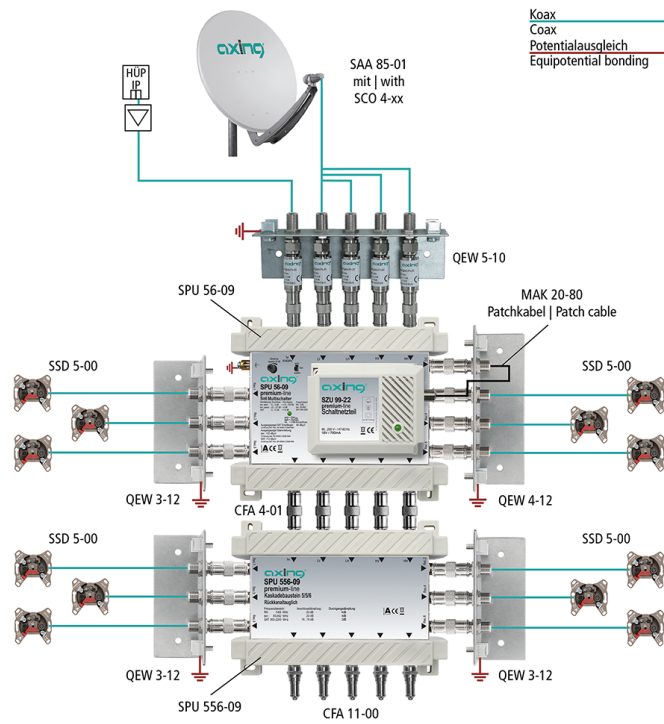

Suitable products

[QEW 3-12 Earthing angle | single-rowed | quickfix](#)

[CFA 11-00 Terminating resistor | 75 Ohm | DC isolated](#)

[CFA 4-01 Adapter F/F | Quickfix](#)