

SPU 924-06 Multiswitch stand-alone/cascade unit | 9 in 24 | basic-line



- ✓ For up to 24 subscribers
- ✓ Subscriber ports SAT active, terrestrial passive
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)
- ✓ Powered by ext. power supply SZU 99-06 (not included in delivery) or via the SAT-IF trunk lines
- ✓ Cascadable - Cascade outputs must be terminated with DC-isolated 75 Ohm terminating resistors (e.g. CFA 11-00, not included in delivery)

Order information

Type	SPU 924-06
Order no.	SPU92406
GTIN	7611682005417
PE	1
VE	1
EU customs tariff number	85291095




Technical data

Inputs	
Number	9
Frequency range	5...862 MHz   950...2400 MHz
Max. LNB current	1500 mA
Subscriber ports	
Number	24
Switch commands	13/18 V, 0/22 kHz, DiSEqC 1.0
Tap loss TERR	32 dB ±3 dB
Tap loss SAT	2...0 dB ±2 dB
Max. output level SAT (3rd order SAT EN 50083:3 35dB KMA, 2 sender test method)	102 dBμV
Current consumption per port (without LNB supply)	< 35 mA
Trunk outputs	
Number	9
Through loss TERR	4...6 dB ±1 dB
Through loss SAT	2...6 dB ±1.5 dB
Connectors	
Connector type	F
General	
Current consumption	10 mA
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	202 x 306 x 63 mm
Weight	1.160 kg

IP code

IP20

## Example of use

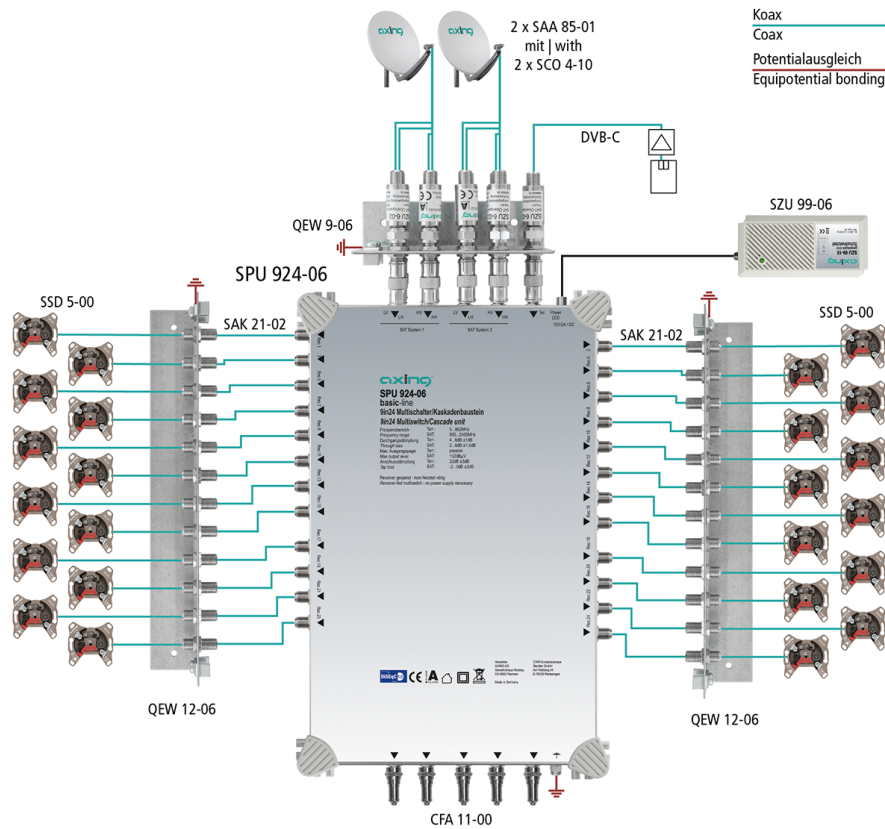

## Suitable products

[QEW 9-06](#) Earthing angle | two-rowed | surge protection

[QEW 12-06](#) Earthing angle | single-rowed

[SAK 21-02 F](#) | Quickfix | patch cable | right-angle connectors | double shielded | 0.20 m

[SAK 41-02 F](#) | Quickfix | patch cable | right-angle connectors | double shielded | 0.40 m

[CFA 11-00](#) Terminating resistor | 75 Ohm | DC isolated

[CFA 4-01](#) Adapter F/F | Quickfix