

SPU 9912-09 Cascade unit | 9 in 12 | premium-line



- ✓ For up to 12 subscribers
- ✓ Passive satellite and terrestrial path
- ✓ For cascadable 9 in x SAT systems
- ✓ Optimized for the use with SPU 9xx-09
- ✓ Suitable for broadband return path (EoC suitable up to 204 MHz)

Order information

| | |
|--------------------------|---------------|
| Type | SPU 9912-09 |
| Order no. | SPU991209 |
| GTIN | 7611682139983 |
| PE | 1 |
| VE | 1 |
| EU customs tariff number | 85291095 |



Technical data

Inputs

| | |
|-----------------|----------------------------------|
| Number | 9 |
| Frequency range | 5 ... 862 MHz 950 ... 2200 MHz |

Subscriber ports

| | |
|---------------------|--------|
| Number | 12 |
| Tap loss TERR | 25 dB |
| Isolation | >26 dB |
| Switching isolation | >26 dB |

Trunk outputs

| | |
|------------------------|----------|
| Number | 9 |
| Through loss TERR | 5 dB |
| Isolation | >30 dB |
| Through loss SAT | 3...6 dB |
| Rejection (SAT TERR) | >40 dB |


Connectors

| | |
|----------------|---|
| Connector type | F |
|----------------|---|

General

| | |
|--|-------------------|
| Operating temperature range (acc. to EN 60065) | -20...+50°C |
| Dimensions (W × H × D) appr. | 230 × 180 × 40 mm |
| Weight | 0.870 kg |

Example of use

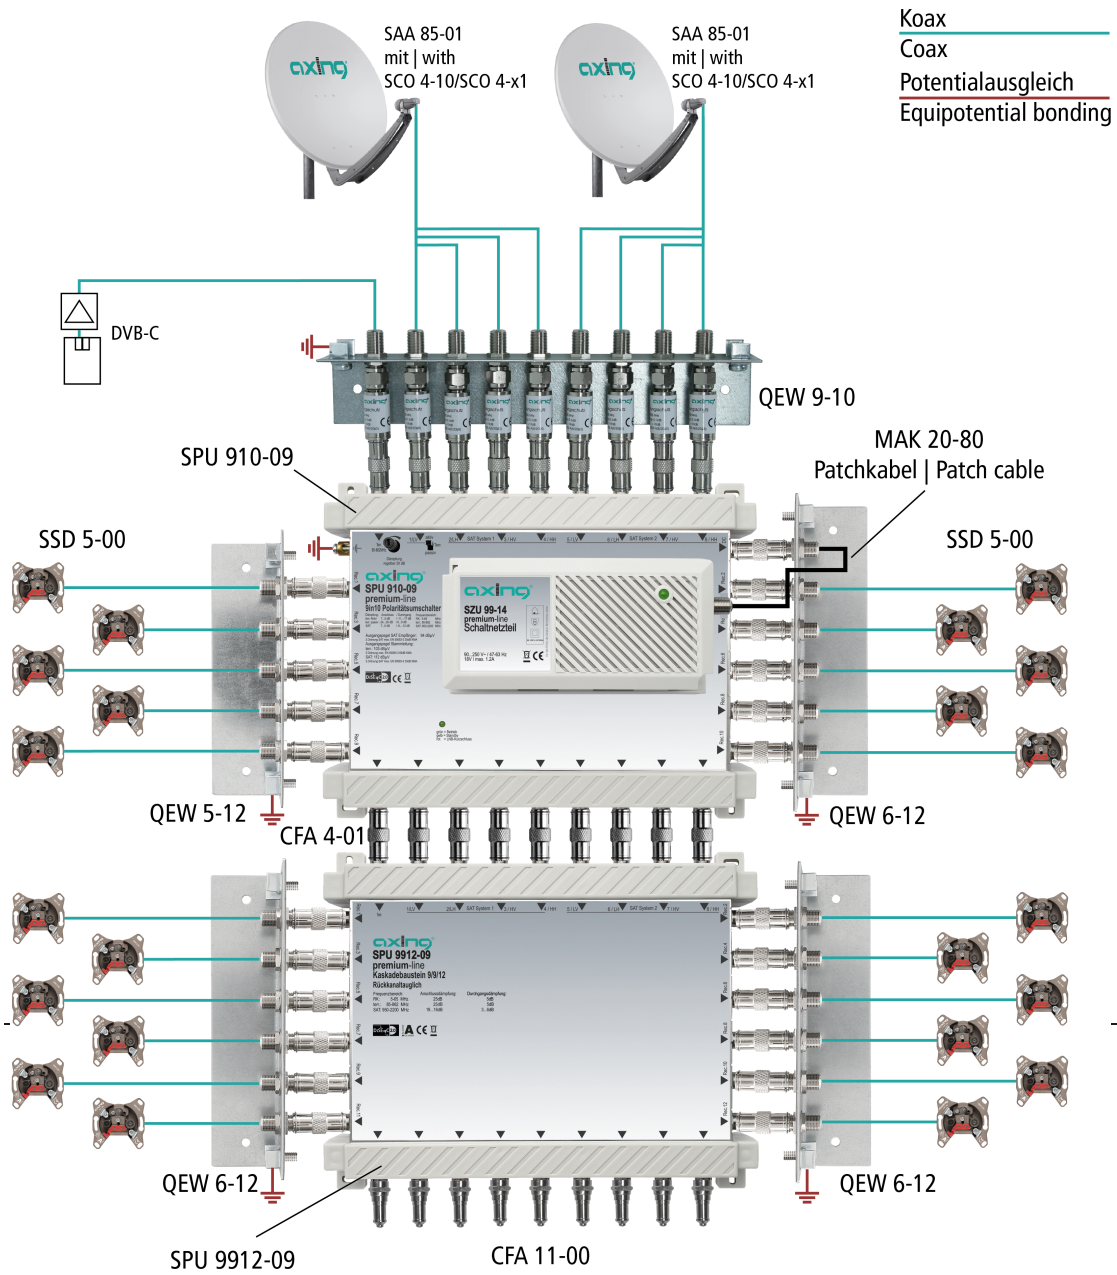

Suitable products

- QEW 6-12 Earthing angle | single-rowed | quickfix
- CFA 11-00 Terminating resistor | 75 Ohm | DC isolated
- CFA 4-01 Adapter F | F | Quickfix