


SSD 5-15 SAT multimedia loop-through outlet 15 dB | 5...2200 MHz | CATV | SAT | DATA

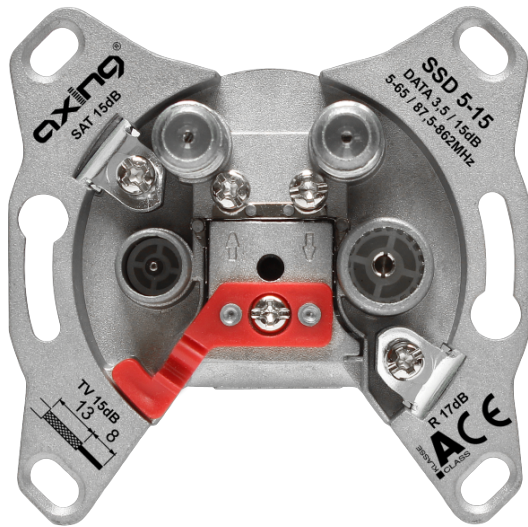

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ With high pass filter on the trunk (blocked return path)
- ✓ Suitable for return path 5...65 MHz
- ✓ Suitable for Unicable I (EN50494) and Unicable II (EN50607)
- ✓ Isolated with diodes
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F socket
- ✓ Surface treated

Order information

Type	SSD 5-15
Order no.	SSD00515
GTIN	7611682003673
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Tap method	Filter circuit/directional coupler
Trunk line	
Frequency range input	5...2200 MHz
Through loss	≤ 45 dB @ 5...65 MHz ≤ 4 dB @ 85...862 MHz ≤ 6 dB @ 862...2200 MHz
Frequency range output	5...2200 MHz
DC power pass	yes
Suitable cables (Inner conductor outer diameter)	0.63...1.13 mm 4.70...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	109...862 MHz
Tap loss	15 dB +1.5/-2.0 dB
Radio connector	
Connector type	IEC-female
Frequency range	87.5...125 MHz
Tap loss	17 dB ±2.0 dB
SAT connector	
Connector type	F-female
Frequency range	950...2200 MHz
Tap loss	15 dB ±1.5 dB
DC power pass to trunk	yes
DATA connector	
Connector type	F-female
Frequency range	5...65 MHz 85...862 MHz
Tap loss	<3.5 dB 15 dB ±1.5 dB
General	
Dimensions (W × H × D) appr.	68 × 68 × 39 mm
Weight	0.095 kg

Suitable products

[SZU 2-02 Cover plate | TV/R/SAT/DATA | single piece](#)

[TZU 1-00 Surface frame](#)

[SZU 2-12 Cover plate | TV/R/SAT/DATA | two-parts](#)

[TZU 1-10 Surface frame](#)

[TZU 3-01 Terminating resistor, DC-isolated](#)