


**SSD 6-07 Programmable single cable end outlet terminated 7 dB | 5 ... 2200 MHz | CATV | SAT**

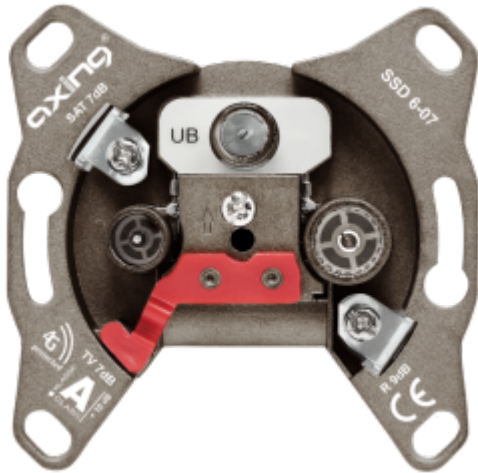

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for return path 5 ... 65 MHz
- ✓ Suitable for Unicable I (EN50494) and Unicable II (EN50607)
- ✓ Each socket can be allocated to one ore more user-bands (programming with the SZU 60-00 programmer and the free-of charge software AnDoKon (www.axing.com | download))
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F socket
- ✓ Surface treated

**Order information**

Type	SSD 6-07
Order no.	SSD00607
GTIN	7611682002294
PE	1
VE	1
EU customs tariff number	85291095



**Technical data**

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Tap method	Filter circuit/directional coupler
Trunk line	
Frequency range input	5 ... 2200 MHz
Suitable cables (Inner conductor   outer diameter)	0.63 ... 1.13 mm   4.70...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	109 ... 862 MHz   5...65MHz
Tap loss	7 dB ±1.5 dB
Radio connector	
Connector type	IEC-female
Frequency range	87.5 ... 108 MHz
Tap loss	9 dB ±2.0 dB
SAT connector	
Connector type	F female
Frequency range	950 ... 2200 MHz
DC power pass to trunk	yes
General	
Dimensions (W x H x D) appr.	68 x 68 x 39 mm
Weight	0.102 kg

**Suitable products**

- [SZU 60-00 Antenna wall outlet programmer for SSD 6-xx](#)
- [SZU 2-00 Cover plate | TV/R/SAT | single piece](#)
- [TZU 1-00 Surface frame](#)
- [SZU 2-10 Cover plate | TV/R/SAT | two-parts](#)
- [TZU 1-10 Surface frame](#)