


SSD 6-10 Programmable single cable loop-through outlet 10 dB | 5 ... 2200 MHz | CATV | SAT

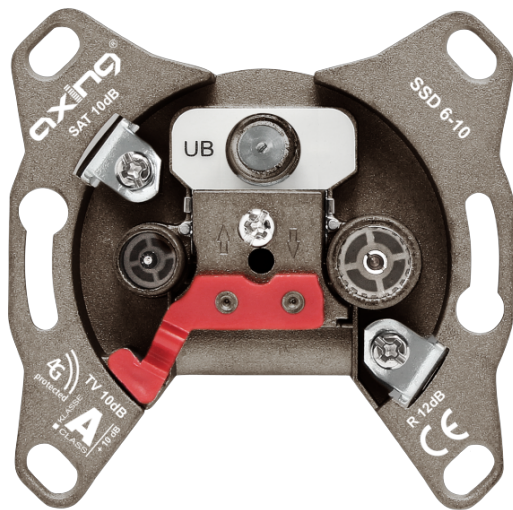

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for return path 5 ... 65 MHz
- ✓ Suitable for Unicable I (EN50494) and Unicable II (EN50607)
- ✓ Each socket can be allocated to one ore more user-bands (programming with the SZU 60-00 programmer and the free-of charge software AnDoKon (www.axing.com | download))
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F socket
- ✓ Surface treated

Order information

Type	SSD 6-10
Order no.	SSD00610
GTIN	7611682002300
PE	1
VE	1
EU customs tariff number	85291095



Technical data

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Tap method	Filter circuit/directional coupler
Trunk line	
Frequency range input	5 ... 2200 MHz
Through loss	≤ 2.0 dB @ 5...862 MHz ≤ 3.0 dB @ 862...2200 MHz
Frequency range output	5 ... 2200 MHz
DC power pass	yes
Suitable cables (Inner conductor outer diameter)	0.63 ... 1.13 mm 4.70...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	109 ... 862 MHz 5...65MHz
Tap loss	10 dB ±1.5 dB
Radio connector	
Connector type	IEC-female
Frequency range	87.5 ... 108 MHz
Tap loss	12 dB ±2.0 dB
SAT connector	
Connector type	F female
Frequency range	950 ... 2200 MHz
DC power pass to trunk	yes
General	
Dimensions (W × H × D) appr.	68 × 68 × 39 mm
Weight	0.102 kg

Suitable products

- [SZU 60-00 Antenna wall outlet programmer for SSD 6-xx](#)
- [SZU 2-00 Cover plate | TV/R/SAT | single piece](#)
- [TZU 1-00 Surface frame](#)
- [SZU 2-10 Cover plate | TV/R/SAT | two-parts](#)
- [TZU 1-10 Surface frame](#)
- [TZU 3-01 Terminating resistor, DC-isolated](#)