
SSD 7-00 Twin end outlet for SAT | CATV | DATA

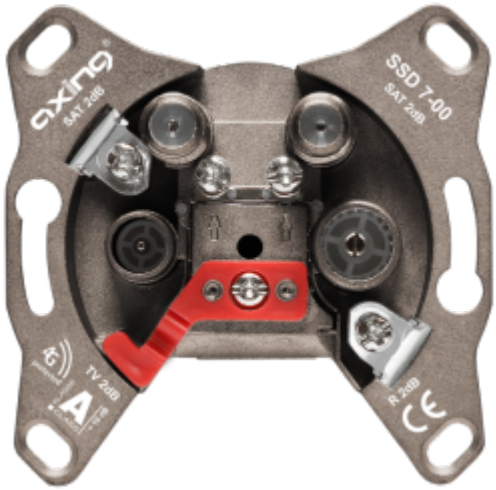

- ✔ 4-port multimedia socket for 2 x satellite, 1 x cable TV or cable modem and 1 x radio.
- ✔ Class A (+10 dB) according to EN 50083-2
- ✔ Suitable for return path 5…65 MHz
- ✔ Suitable for Unicable I (EN50494) and Unicable II (EN50607)
- ✔ Easy to install
- ✔ Stripping length 8/13 mm
- ✔ Extended F sockets
- ✔ Surface treaded
- ✔ Vodafone listed

Order information

Type	SSD 7-00
Order no.	SSD00700
GTIN	7611682002751
PE	1
VE	1
EU customs tariff number	85291095

Technical data

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Tap method	Filter circuit/directional coupler
Trunk line	
Frequenzy range input right	950…2200 MHz
Frequenzy range input left	5…2200 MHz
Isolation internal	≥ 30 dB
Suitable cables (Inner conductor | outer diameter)	0.63…1.13 mm | 4.70…7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	109…862 MHz | 5…65MHz
Tap loss	2 dB ±1.0 dB
Radio connector	
Connector type	IEC-female
Frequency range	87.5…125 MHz
Tap loss	2 dB ±1.0 dB
SAT connector left	
Connector type	F-female
Frequency range	950…2200 MHz
Tap loss	2 dB ±1.0 dB
DC power pass to trunk	yes
SAT connector right	
Connector type	F-female
Frequency range	950…2200 MHz
Tap loss	2 dB ±1.0 dB
DC power pass to trunk	yes
General	
Dimensions (W × H × D) appr.	68 × 68 × 39 mm
Weight	0.107 kg

Suitable products

SZU 2-04 Cover plate | TV/R/SAT/SAT | single piece
TZU 1-00 Surface frame
SZU 2-14 Cover plate | TV/R/SAT/SAT | two-parts
TZU 1-10 Surface frame