


## SVE 3-01 3-way SAT splitter | 5...2400 MHz

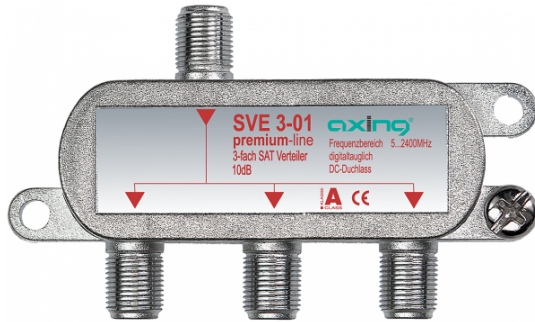

- ✓ DC-isolated with diodes
- ✓ DC power pass
- ✓ Suitable for single cable
- ✓ Connectors gold-plated
- ✓ With detachable mounting brackets

## Order information

|                          |               |
|--------------------------|---------------|
| Type                     | SVE 3-01      |
| Order no.                | SVE00301      |
| GTIN                     | 7611682260038 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291080      |



## Technical data

|                                     |                 |
|-------------------------------------|-----------------|
| Screening factor acc. to EN 50083-2 | > 90 dB         |
| Frequency range                     | 5...2400 MHz    |
| DC power pass                       | yes             |
| Splitting                           | 3-way           |
| Distribution loss                   |                 |
| 5...862 MHz                         | ≤ 7.5 dB        |
| 950...1750 MHz                      | ≤ 7.0 dB        |
| 1750...2400 MHz                     | ≤ 11 dB         |
| Isolation                           |                 |
| 950...1750 MHz                      | ≥ 20 dB         |
| 1750...2400 MHz                     | ≥ 20 dB         |
| Return loss                         |                 |
| Input @ 5...862 MHz                 | ≥ 10 dB         |
| Input @ 950...1750 MHz              | ≥ 10 dB         |
| Input @ 1750...2400 MHz             | ≥ 12 dB         |
| Output @ 5...862 MHz                | ≥ 10 dB         |
| Output @ 950...1750 MHz             | ≥ 10 dB         |
| Output @ 1750...2400 MHz            | ≥ 12 dB         |
| Isolation                           |                 |
| 5...862 MHz                         | ≥ 15 dB         |
| 950...1750 MHz                      | ≥ 20 dB         |
| Tap loss                            |                 |
| 1750...2400 MHz                     | ≥ 20 dB         |
| Connectors                          |                 |
| Connector type                      | F               |
| General                             |                 |
| Dimensions (W × H × D) appr.        | 89 × 55 × 30 mm |
| Weight                              | 0.093 kg        |