

SVS 1717-06 Headamplifier | 17 in 17 | basic-line



- ✓ For use with SPU 17xx-06 systems
- ✓ 16 × SAT 950...2200 MHz | Gain 15...20 dB
- ✓ 1 × TERR 5...862 MHz | Gain 20 dB
- ✓ Built-in attenuators 0...15 dB
- ✓ Powered by ext. power supply SZU 99-06 (not included in delivery) or via the SAT-IF trunk lines
- ✓ Die cast housing

Order information


Type	SVS 1717-06
Order no.	SVS171706
GTIN	7611682005578
PE	1
VE	1
EU customs tariff number	85437030



Technical data

Inputs	
Number	17
Frequency range	40...862 MHz 950...2200 MHz
Attenuator adjustment range	0...15 dB
Gain TERR	20 dB
Gain SAT	15...20 dB
Output	
Noise figure	12 dB
Trunk outputs	
Number	17
Max. output level TERR (3rd order EN 50083-3, 60 dB KMA)	112 dBμV
Max. output level trunk SAT (3rd order EN 50083-3, 35 dB KMA, 2 sender test method)	105 dBμV
Noise figure	5 dB
Connectors	
Connector type	F
Return loss	12 dB
General	
Operating voltage	15 VDC
Current consumption	800 mA
Equipotential bonding connection	4 mm²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W × H × D) appr.	440 × 70 × 45 mm
Weight	1.010 kg
IP code	IP20

Example of use

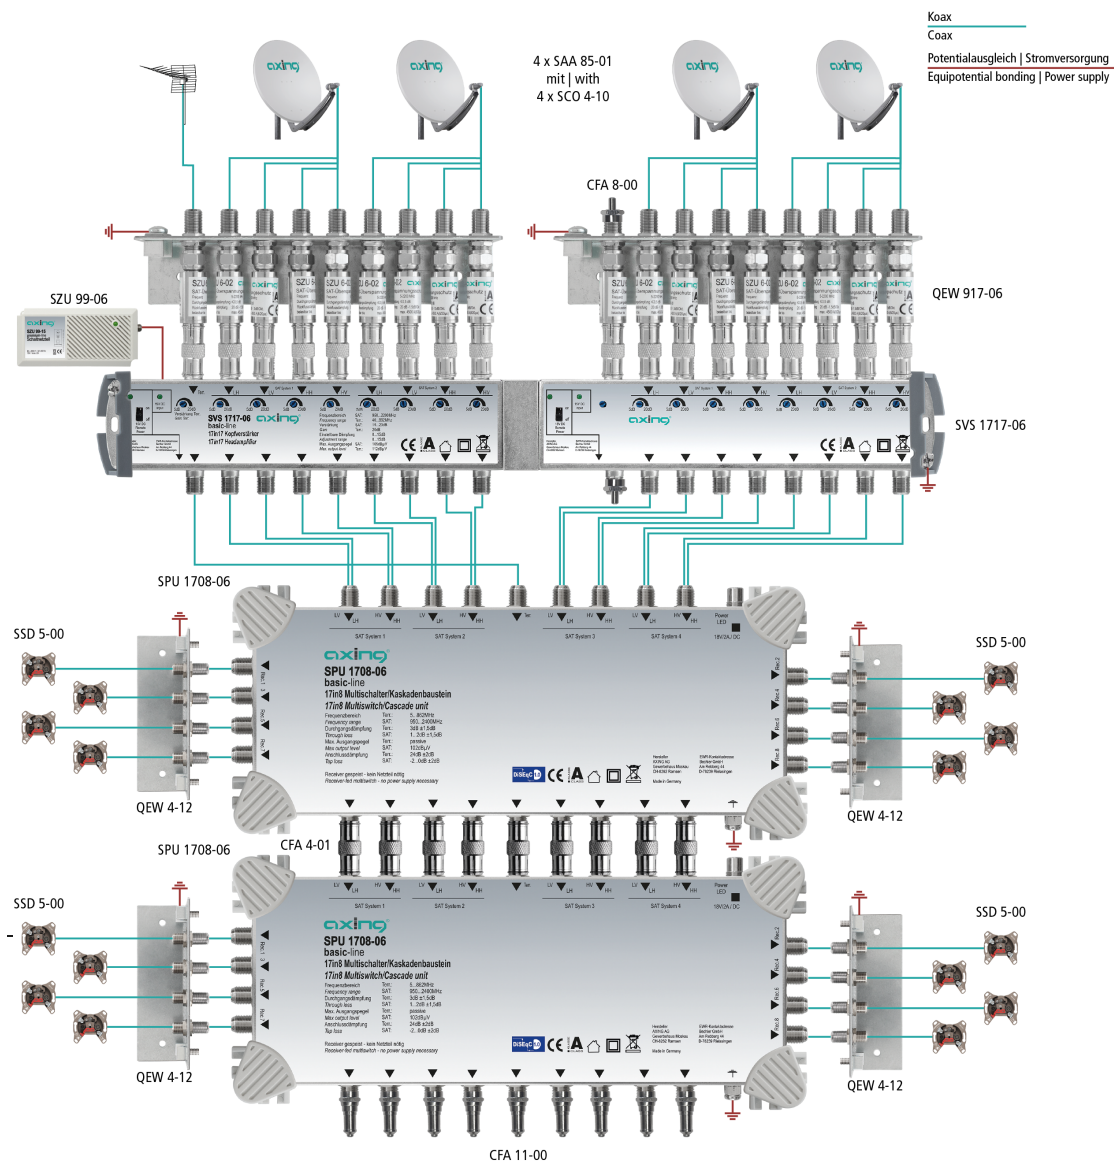

Suitable products

QEW 917-06 Earthing angle | single-rowed | surge protection