

## SVS 1717-09 Headamplifier | 17 in 17



- ✓ For use with SPU 17xx-09 systems
- ✓ 16 × SAT 950...2200 MHz | Gain 21...27 dB
- ✓ 1 × TERR 5...862 MHz | Gain 15 dB
- ✓ Built-in attenuators 0...15 dB
- ✓ Switching power supply unit (detachable up to 10 m)
- ✓ 17 termination resistors CFA 11-00 included

### Order information


Type	SVS 1717-09
Order no.	SVS171709
GTIN	7611682003321
PE	1
VE	1
EU customs tariff number	85437030



### Technical data

Inputs	
Number	17
Frequency range	5 ... 862 MHz   950 ... 2200 MHz
Attenuator adjustment range	0...15 dB
Gain TERR	15 dB
Gain SAT	21...27 dB
Gain return path (passive)	-2 dB
Isolation SAT inputs   SAT inputs	40 dB
Isolation TERR   SAT	40 dB
Trunk outputs	
Number	17
Max. output level TERR (3rd order EN 50083-3, 60 dB KMA)	109 dB $\mu$ V
Max. output level trunk SAT (3rd order EN 50083-3, 35 dB KMA, 2 sender test method)	114 dB $\mu$ V
Isolation TERR   SAT	40 dB
Isolation SAT   SAT	40 dB
Connectors	
Connector type	F
General	
Operating temperature range (acc. to EN 60065)	-20...+50°C
Switching power supply	90...250 V~   47...63 Hz   18 V=I2 A
Power consumption	22 W
Equipotential bonding connection	4 mm <sup>2</sup>
Dimensions (W × H × D) appr.	407 (432)* × 145 × 85 mm
Weight	1.600 kg
IP code	IP20
Comments	* incl. DC bridge

## Example of use

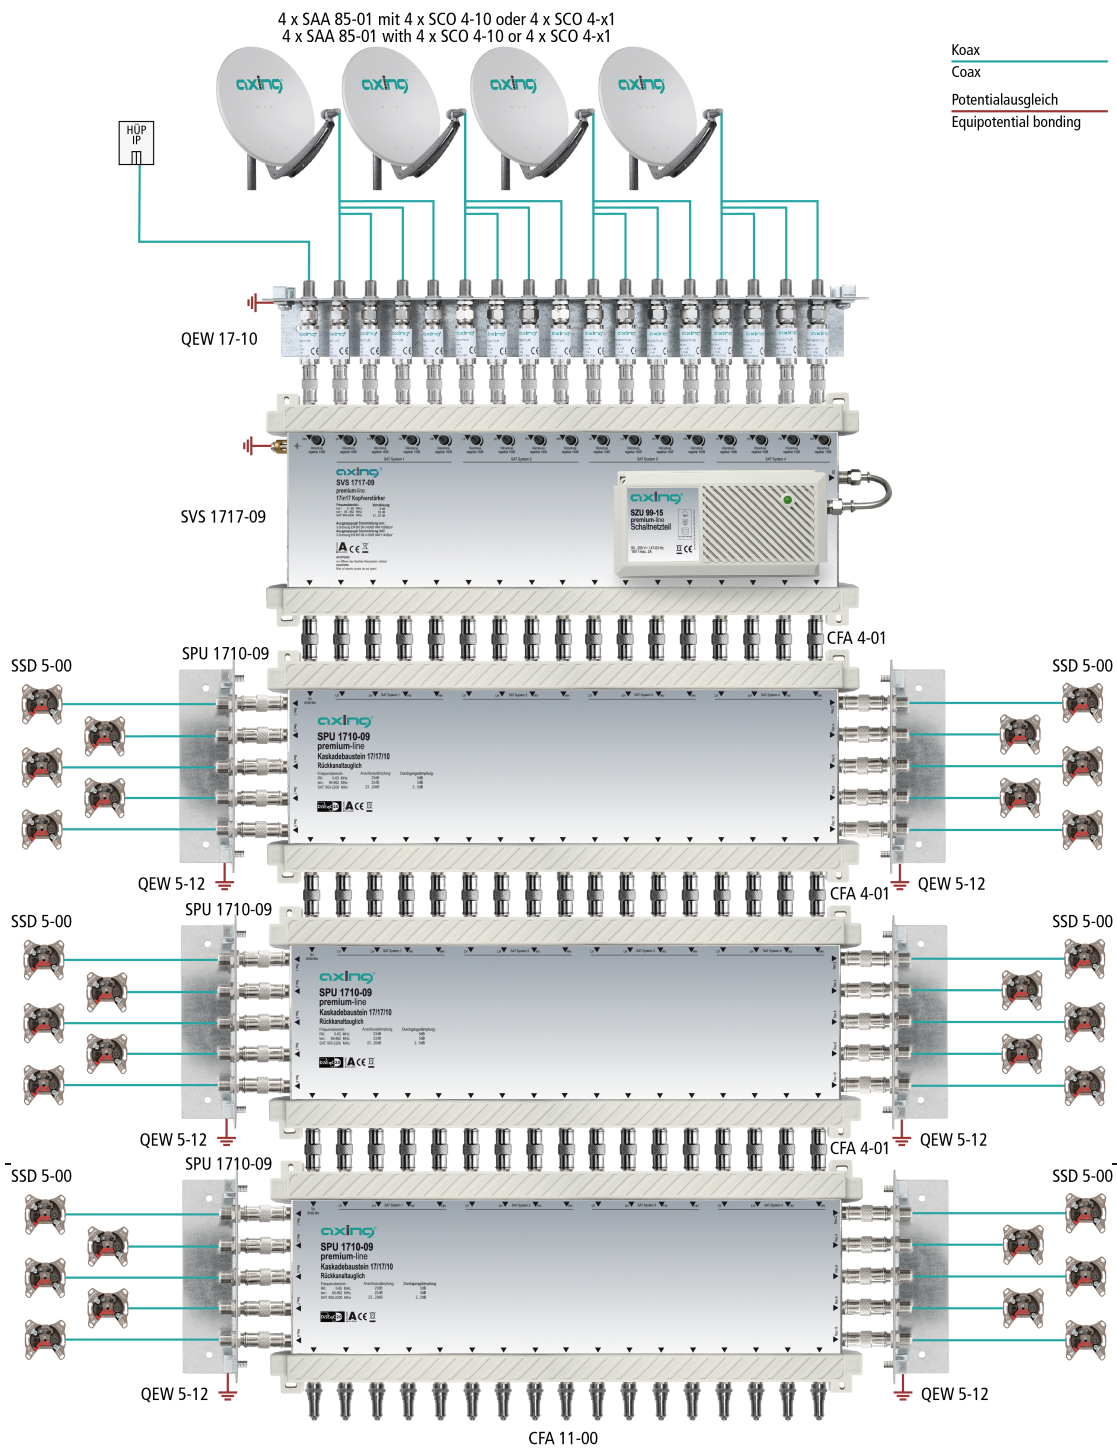

## Suitable products

QEW 17-10 Earthing angle | single-rowed | surge protection