


## SZU 512-06 Complete multiswitch package 5 in 12 | completely pre-assembled

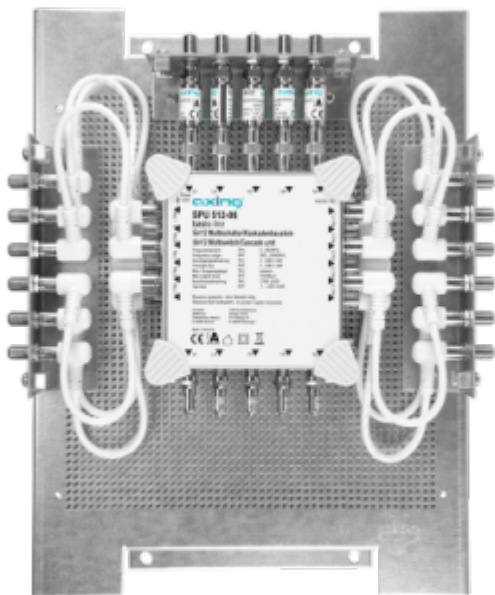

- ✓ For up to 12 subscribers
- ✓ Minimum installation time due to ready-to-operate, pre-installed system
- ✓ Service- and assembly-friendly
- ✓ With overvoltage protection and equipotential bonding at the inputs
- ✓ With equipotential bonding at subscriber outputs
- ✓ Consisting of:
  - ✓ 1 x QMP 3045 Perforated mounting plate
  - ✓ 1 x SPU 512-06 Multiswitch 5 in 12
  - ✓ 1 x QEW 5-06 Earthing angle
  - ✓ 2 x QEW 6-06 Earthing angle
  - ✓ 5 x CFA 11-00 Terminating resistor
  - ✓ 12 x SAK 21-02 Patch cable
- ✓ Optionally available with power supply unit SZU 99-06

### Order information

Type	SZU 512-06
Order no.	SZU51206
GTIN	7611682007701
PE	1
VE	1
EU customs tariff number	85291080

### Technical data

#### Inputs

Number	5
Frequency range	5...862 MHz   950...2400 MHz
Max. LNB current	1500 mA
Isolation V   H	>30 dB
Isolation TERR   SAT	30 dB

#### Subscriber ports

Number	12
Switch commands	13/18 V, 0/22 kHz
Max. output level SAT (3rd order SAT EN 50083 3 35dB KMA, 2 sender test method)	102 dB $\mu$ V
Current consumption per port (without LNB supply)	< 35 mA

#### Trunk outputs

Number	5
Through loss TERR	2...3 dB $\pm$ 1 dB
Through loss SAT	2...4 dB $\pm$ 1 dB

#### Connectors

Connector type	F
----------------	---

#### General

Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W x H x D) appr.	300 x 400 x 170 mm
IP code	IP20