

TZU 40-03 EoC inserter | 4 dB



- ✓ For feeding in RF-modulated IP signals
- ✓ 5...1006 MHz | 85...1006 MHz (with 85 MHz high-pass filter)
- ✓ 4 dB EoC loss between connector "EoC" and connector "Eingang/Ausgang"
- ✓ "Eingang/Ausgang"
- ✓ 4 dB through loss between the connector "terr. Signale" and the connector "Eingang/Ausgang"
- ✓ Connection 1: terr. Signale
- ✓ Connection 2: EoC
- ✓ Connection 3: Eingang/Ausgang

Order information


|                          |               |
|--------------------------|---------------|
| Type                     | TZU 40-03     |
| Order no.                | TZU04003      |
| GTIN                     | 7611682003475 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291080      |



Technical data

|                              |                              |
|------------------------------|------------------------------|
| Application                  | EoC                          |
| Frequency range              | 5...1006 MHz   85...1006 MHz |
| Through loss                 | 4 dB                         |
| EoC loss                     | 4 dB                         |
| Connectors                   |                              |
| Connector 1                  | F-female                     |
| Connector 2                  | F-female                     |
| Connector 3                  | F-male, quickfix             |
| General                      |                              |
| Dimensions (W x H x D) appr. | 55 x 34 x 18 mm              |
| Weight                       | 0.029 kg                     |

Example of use

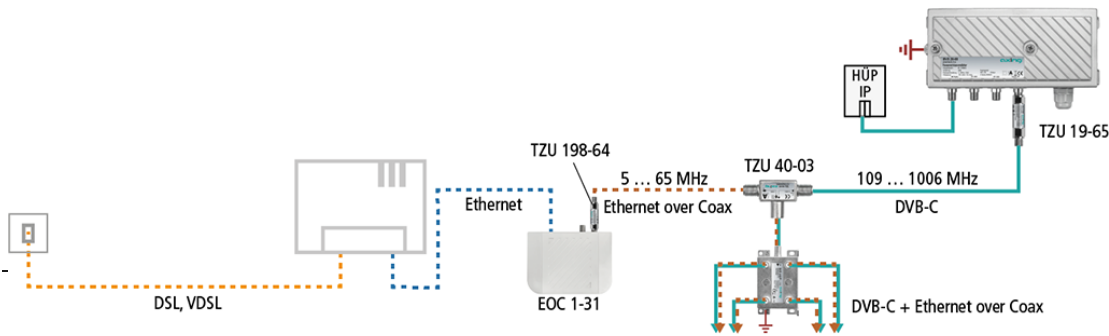

Suitable products

- [EOC 1-31 Ethernet over Coax | Peer-to-Peer | 720 Mbps](#)
- [EOC 2-31 Ethernet over Coax | Peer-to-Peer | 720 Mbps | WiFi](#)
- [EOC 20-01 Ethernet over Coax | Master | 720 Mbps](#)
- [EOC 20-02 Ethernet over Coax | Endpoint | 720 Mbps](#)