

## TZU 40-04 EoC inserter | 15 dB



- ✓ To feed in RF modulated IP signals
- ✓ 5...1006 MHz | 85...1006 MHz (with high pass filter 85 MHz)
- ✓ 15 dB EoC loss between connector "EoC" and connector "Input/Output"
- ✓ 1,3 dB through loss between connector „terr. Signale“ and connector „Eingang/Ausgang“
- ✓ Connector 1: terr. Signale
- ✓ Connector 2: Eingang/Ausgang
- ✓ Connector 3: EoC

## Order information


|                          |               |
|--------------------------|---------------|
| Type                     | TZU 40-04     |
| Order no.                | TZU04004      |
| GTIN                     | 7611682004472 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291080      |



## Technical data

|                              |                              |
|------------------------------|------------------------------|
| Application                  | EoC                          |
| Frequency range              | 5...1006 MHz   85...1006 MHz |
| Through loss                 | 1.3 dB                       |
| EoC loss                     | 15 dB                        |
| Connectors                   |                              |
| Connector 1                  | F-female                     |
| Connector 2                  | F-male, Quickfix             |
| General                      |                              |
| Dimensions (W × H × D) appr. | 55 × 34 × 18 mm              |
| Weight                       | 0.290 kg                     |

## Example of use

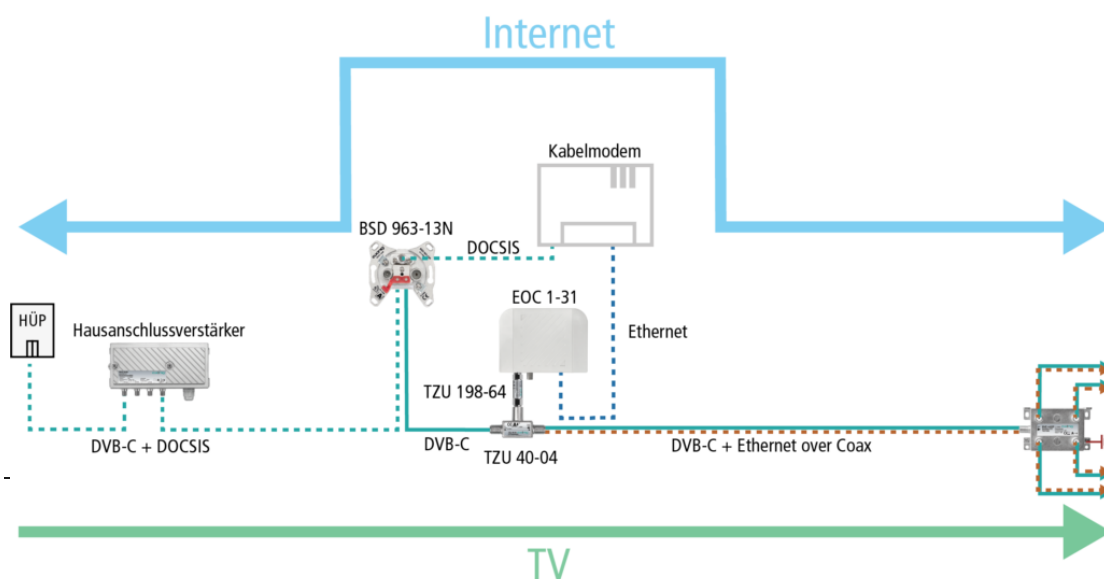

## Suitable products

EOC 1-31 Ethernet over Coax | Peer-to-Peer | 720 Mbps

EOC 2-31 Ethernet over Coax | Peer-to-Peer | 720 Mbps | WiFi

EOC 20-01 Ethernet over Coax | Master | 720 Mbps

EOC 20-02 Ethernet over Coax | Endpoint | 720 Mbps