


## BSD 4-18N CATV loop-through outlet 18 dB | 5...1006 MHz

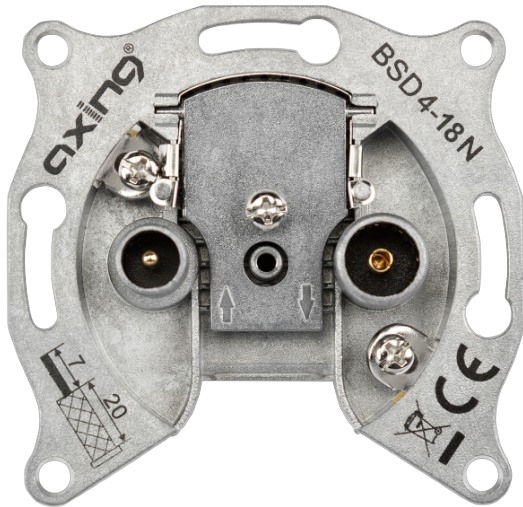

- ✓ Suitable for broadband return path
- ✓ Surface treated

### Order information

|                          |               |
|--------------------------|---------------|
| Type                     | BSD 4-18N     |
| Order no.                | BSD00418N     |
| GTIN                     | 7611682007343 |
| PE                       | 1             |
| VE                       | 1             |
| EU customs tariff number | 85291095      |



### Technical data

|  |                                |
|--|--------------------------------|
| Tap method   | Double directional coupler     |
| Through loss                                       | 1.5...2.5 dB                   |
| Trunk line   |                                |
| Frequency range input                              | 5...1006 MHz                   |
| Through loss                                       | 1.5...2.5 dB                   |
| Isolation internal                                 | ≥ 28 dB                        |
| Frequency range output                             | 5...1006 MHz                   |
| Suitable cables (Inner conductor   outer diameter) | 0.63...1.13 mm   4.7...7.35 mm |
| TV connector                                       |                                |
| Connector type                                     | IEC-male                       |
| Frequency range                                    | 5...1006 MHz                   |
| Tap loss   | 18 dB ± 2 dB                   |
| Radio connector                                    |                                |
| Connector type                                     | IEC-female                     |
| Frequency range                                    | 5...1006 MHz                   |
| Tap loss   | 18 dB ± 2 dB                   |
| General  |                                |
| Dimensions (W × H × D) appr.                       | 70 × 66 × 32 mm                |
| Weight   | 0.091 kg                       |

### Suitable products

[TZU 2-00 Cover plate | TV/R | single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 2-10 Cover plate | TV/R | two-parts](#)

[TZU 1-10 Surface frame](#)

[TZU 3-00 Terminating resistor](#)