


## BSD 967-04X Multimedia end outlet 5 ... 1800 MHz 4 dB | CATV | DATA

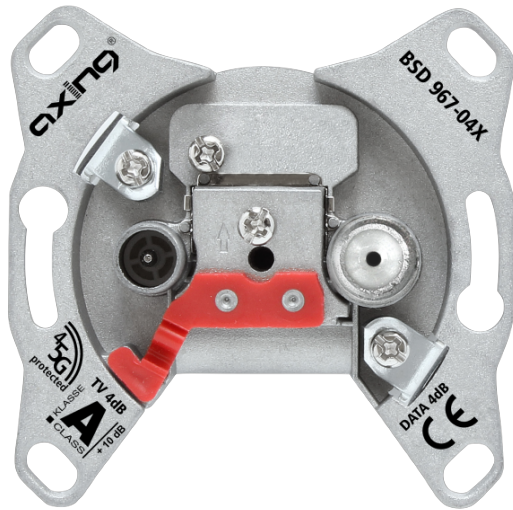

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ For DOCSIS 3.1/4.0 applications
- ✓ Suitable for broadband return path
- ✓ High overvoltage protection
- ✓ High intermodulation immunity ( $\leq 115$  dBc)
- ✓ TV port IEC male
- ✓ DATA port F female
- ✓ Surface treated
- ✓ Vodafone listed according to VF TS 142

### Order information

Type	BSD 967-04X
Order no.	BSD96704X
GTIN	7611682008302
PE	1
VE	1
EU customs tariff number	85291095



### Technical data

Screening factor acc. to EN 50083-2	Class A (+10 dB)
Trunk line	
Frequency range input	5 ... 1800 MHz
Suitable cables (inner conductor   outer conductor   outer diameter)	0.4 ... 1.13 mm   3.5 ... 6.0 mm   4.70 ... 7.35 mm
TV connector	
Connector type	IEC male
Tap loss	4 dB $\pm$ 1 dB
DATA connector	
Connector type	F female
Frequency range	5 ... 1800 MHz
Tap loss	4 dB $\pm$ 1 dB
Isolation TV@DATA	$\geq 60$ dB @ 5 ... 204 MHz $\geq 25$ dB @ 258 ... 1800 MHz
General	
Dimensions (W x H x D) appr.	68 x 68 x 39 mm
Weight	0.1 kg

### Suitable products

[TZU 2-01 Cover plate | TV/DATA | single piece](#)

[TZU 1-00 Surface frame](#)

[TZU 2-11 Cover plate | TV/DATA | two-parts](#)

[TZU 1-10 Surface frame](#)