


BVE 4-01P 4-way splitter | 5...1218 MHz | housing design 01

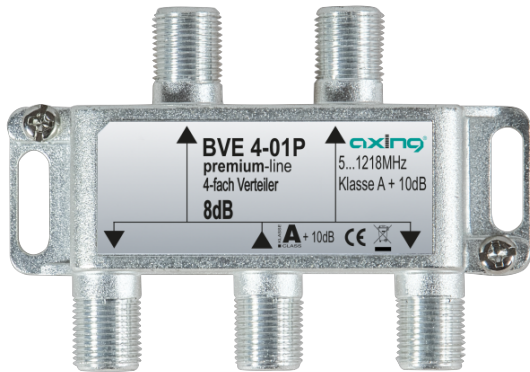

- ✓ High return loss
- ✓ For multimedia-use
- ✓ Inputs and outputs hum-suppressed
- ✓ High intermodulation suppression
- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Return loss and isolation according to VFKD TS 220
- ✓ Vodafone listed

Order information

Type	BVE 4-01P
Order no.	BVE00401P
GTIN	7611682005615
PE	1
VE	1
EU customs tariff number	85291080



Technical data

Frequency range	5...1218 MHz
Screening factor acc. to EN 50083-2	Class A + 10 dB
Intermodulation ratio (EN 60728-4)	120 dBμV
Splitting	4-way
Distribution	
Distribution loss	≤ 6.9 dB @ 5 ... 94 MHz ≤ 6.6 dB @ 94 ... 188 MHz ≤ 6.8 dB @ 188 ... 376 MHz ≤ 7.3 dB @ 376 ... 752 MHz ≤ 7.4 dB @ 752 ... 950 MHz ≤ 8 dB @ 950 ... 1218 MHz
RF connectors	
Type	F-Buchse (IEC 61169-24)
Isolation	
Out-Out	≥ 22 dB @ 10 ... 94 MHz ≥ 20.5 dB @ 94 ... 188 MHz ≥ 19 dB @ 188 ... 376 MHz ≥ 17.5 dB @ 376 ... 752 MHz ≥ 17.5 dB @ 752 ... 950 MHz ≥ 16 dB @ 950 ... 1218 MHz
Connectors	
Connector type	F
Return loss	≥ 18 dB @ 5 ... 94 MHz ≥ 16.5 dB @ 94 ... 188 MHz ≥ 15 dB @ 188 ... 376 MHz ≥ 13.5 dB @ 376 ... 752 MHz ≥ 12 dB @ 752 ... 1218 MHz
General	
Operating temperature range	-15 °C ... +60 °C
Dimensions (W × H × D) appr.	72 × 50 × 26 mm
Weight	0.063 kg
IP code	IP67